



# FLODA

30 W Front and Area LED Lighting Luminaire

Order Code : 3195592  
Product Code : FLO 030Z 40OD00 3K0



## Product Data

### Standard Features


Housing	: Aluminium injection housing
Diffuser	: Microprismatic
Optic	: 100°
IP Grade	: IP66
Installation	: Floor Mounted
Light Source	: Mid Power LED
Electronic Control	: On-Off

### Optical & Electrical Features

Power Consumption	: 28.6 W
Final Luminous Flux	: 2976.1 lm
Efficacy	: 103.7 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 120 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Photobiological Risk Group	: RG1

\* There is ± 10% Tolerance in Technical Values.

## Photometric Curve

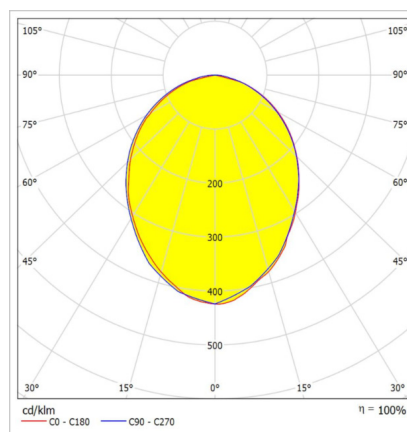

### Other Features & Conditions

Operating Temperature Range	: -20 °C/+45 °C
Impact Resistance	: IK10
Led Life Time - L70	: > 54.000 hours @Ta= 45 °C



### Optional Features

Correlated Color Temperatures	: 6500K
-------------------------------	---------

# FLODA

30 W Front and Area LED Lighting Luminaire

3195592 FLO 030Z 400D00 3K0

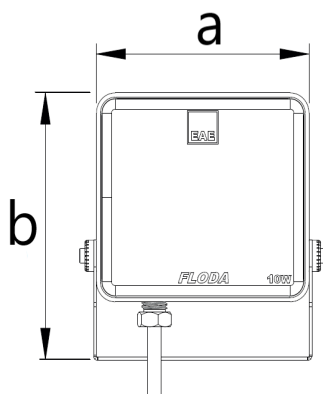

## Dimensions (mm)




	a	b	h
Standard	165	178	50

## Weight (kg)

Standard	0.7
----------	-----



## Suspension Set

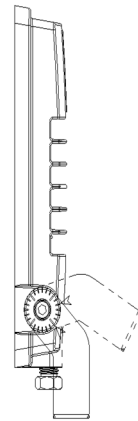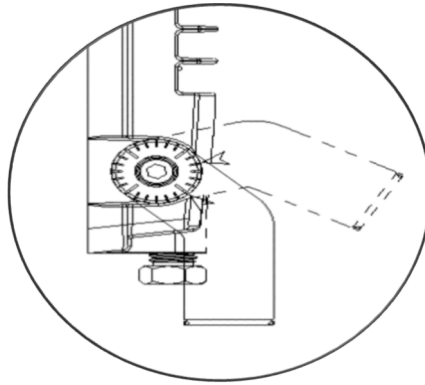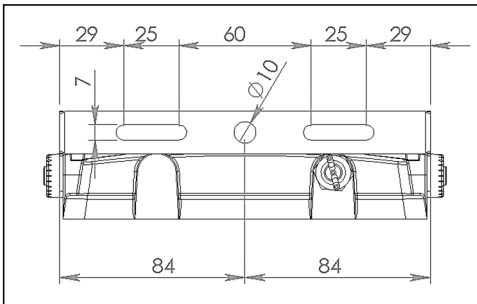

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

**EAE Aydınlatma A.Ş.**  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 11.03.2021