



FLODA

40 W Front and Area LED Lighting Luminaire

Order Code : 3195593
Product Code : FLO 040Z 40OD00 4K6



Product Data

Standard Features

Housing	: Aluminium injection housing
Diffuser	: Microprismatic
Optic	: 100°
IP Grade	: IP66
Installation	: Floor Mounted
Light Source	: Mid Power LED
Electronic Control	: On-Off

Optical & Electrical Features


Power Consumption	: 42.6 W
Final Luminous Flux	: 4629.6 lm
Efficacy	: 108.5 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 150 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Photobiological Risk Group	: RG1

* There is $\pm 10\%$ Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -20 °C/+45 °C
Impact Resistance	: IK10
Led Life Time - L70	: > 54.000 hours @Ta= 45 °C

Photometric Curve

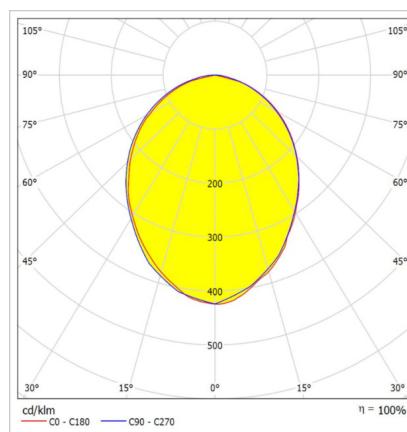


Optional Features

Correlated Color Temperatures	: 6500K
-------------------------------	---------

FLODA

40 W Front and Area LED Lighting Luminaire

3195593 FLO 040Z 400D00 4K6

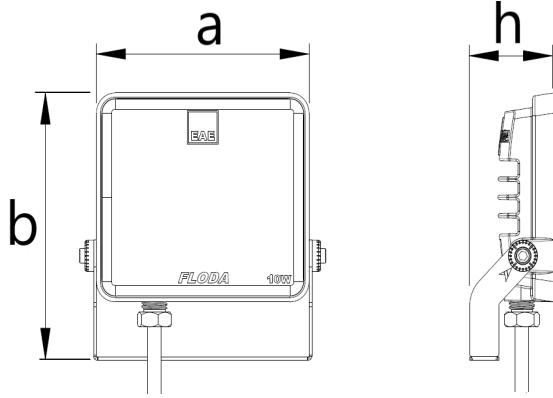

Dimensions (mm)




	a	b	h
Standard	220	228	51.5

Weight (kg)

Standard	1.1
----------	-----



Suspension Set

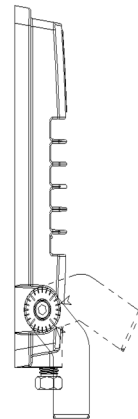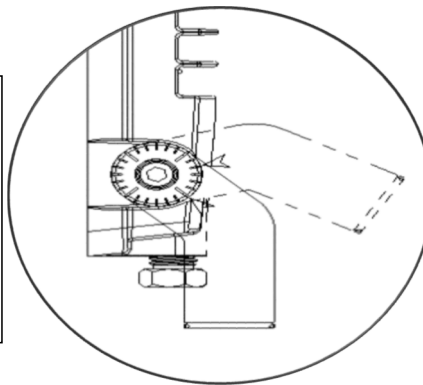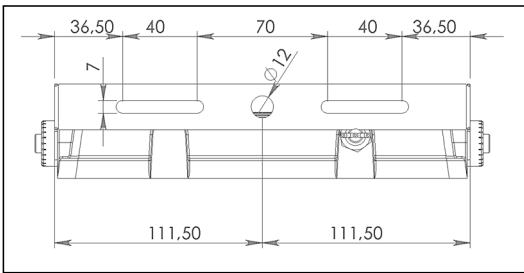

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 11.03.2021