



DOWNLED v.2

Recessed Mounted 8 W Spot Led
Lighting Luminaire

Order Code : 3254662
Product Code : DWL 008A 40PC00 904 04 20 V.2 FLP



Product Data

Standard Features

| | |
|--------------|--------------------|
| Housing | : Aluminum housing |
| Diffuser | : Opal diffuser |
| Ceiling Type | : Plasterboard |
| IP Grade | : IP20 |
| Installation | : Recessed mounted |
| Light Source | : Mid Power LED |

Optical & Electrical Features


| | |
|------------------------------|----------------|
| Power Consumption | : 8 W |
| Final Luminous Flux | : 904 lm |
| Efficacy | : 113 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

* There is $\pm 10\%$ Tolerance in Technical Values.

Other Features & Conditions

| | |
|---|--------------------------|
| Operating Temperature Range | : -5 °C/+35 °C |
| Operating Temperature Range With Emergency Kit | : +5 °C/+35 °C |
| Impact Resistance | : IK02 |
| Led Life Time - L70 | : 72.000 saat @Ta= 35 °C |

Photometric Curve

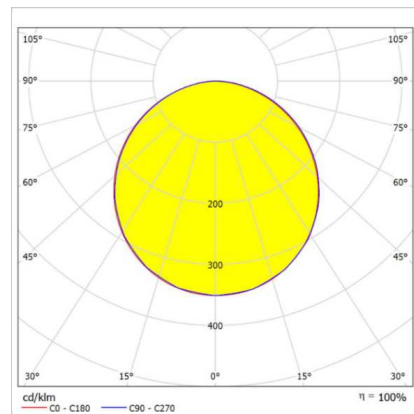



Optional Features

| | |
|----------------------------------|----------------|
| Correlated Color Temperatures | : 3000K, 6500K |
| Emergency Kit Options | : 1, 3 hours |
| DALI Option | : Yes |

DOWNLED v.2


Recessed Mounted 8 W Spot Led Lighting Luminaire

3254662 DWL 008A 40PC00 904 04 20 V.2 FLP

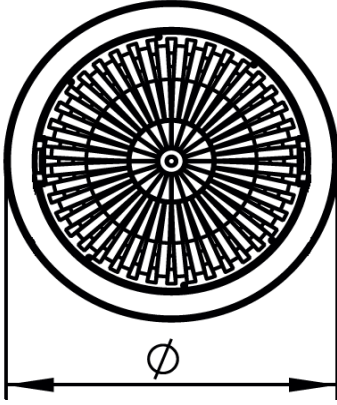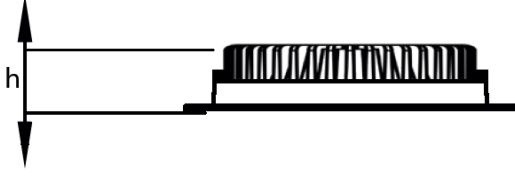

Dimensions (mm)

| | Ø | h | Ø D |
|------------------|-----|----|-----|
| Recessed mounted | 115 | 35 | 100 |



Weight (kg)

| | |
|----------|-----|
| Standard | 250 |
|----------|-----|

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax:
www.eaeaydinlatma.com.tr

Revision date: 14.04.2021