



## ORI

Recessed Mounted 36 W Spot LED Luminaire

Order Code : 3200794  
Product Code : ORI 036A 40SD00 40 4K1 20 YV FLP



### Product Data

#### Standard Features


Housing	: Aluminium housing
Diffuser	: 40° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 36 W
Final Luminous Flux	: 4176 lm
Efficacy	: 116 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

### Photometric Curve

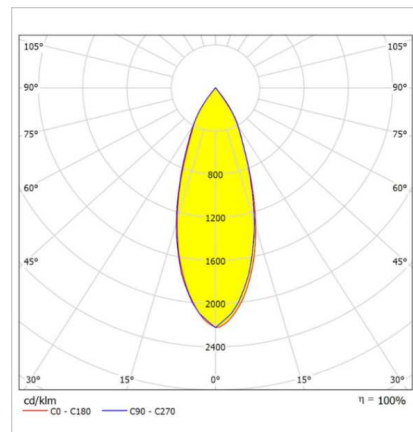

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Impact Resistance	: IK02
LED Life Time - L70	: > 60.000 hours @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 24° / 60°




# ORI

## Recessed Mounted 36 W Spot LED Luminaire

3200794 ORI 036A 40SD00 40 4K1 20 YV FLP

### Dimensions (mm)

	$\varnothing$	h	$\varnothing D$
Standard	119	135	108

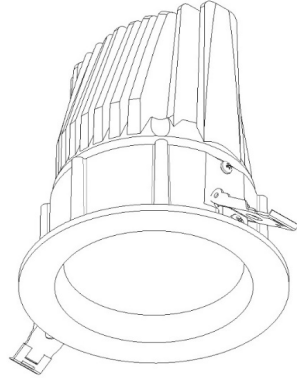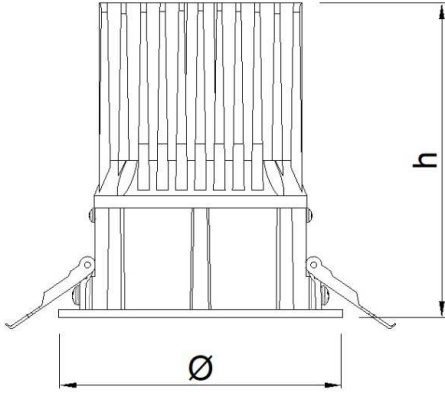

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 07.12.2020