



## RINOA

75 W Pendant LED Lighting Luminaire

Order Code : 3092692  
Product Code : RINA 075S 40OD00 7K6 1200 FLP



### Product Data

#### Standard Features

Housing	: RAL 9003 Powder finished 0,60mm sheet steel housing
Diffuser	: Opal Diffuser
IP Grade	: IP20
Installation	: Pendant
Light Source	: Mid Power LED


#### Optical & Electrical Features

Power Consumption	: 75.5 W
Final Luminous Flux	: 7658.6 lm
Efficacy	: 101.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 1400 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/+35 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 35 °C

### Photometric Curve

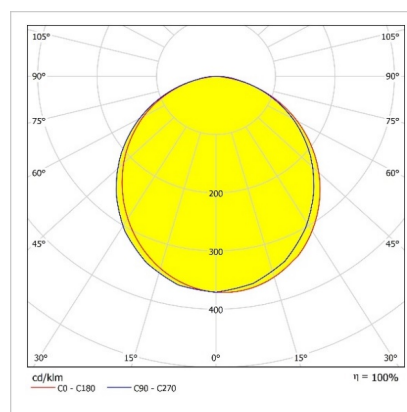


#### Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1, 3 hours
Color Options	: RAL 9005
Electronic Control	: Dali

# RINOA

75 W Pendant LED Lighting Luminaire

3092692 RNA 075S 40OD00 7K6 1200 FLP

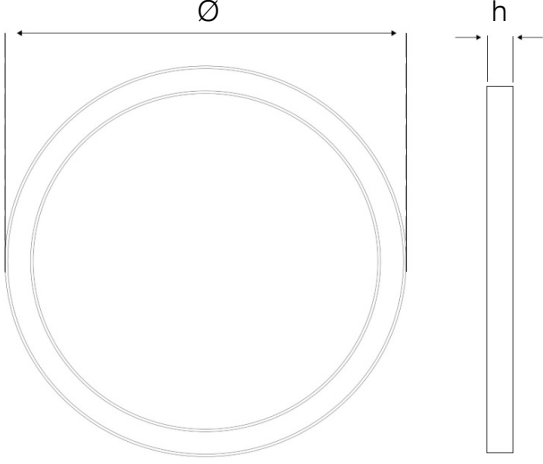

## Dimensions (mm)

	Ø	h
Standard	1206	98



- EAE Aydınlatma reserves the right to make any change without prior notice.



Revision date: 24.02.2022