



Recessed Mounted 8W Spot LED Luminaire



Photometric Curve

Power Consumption	: 8W
Final Luminous Flux	: 866 lm
Efficacy	: 108 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: None
DALI Option	: Yes
Degree Option	: 24° / 60°


LUP Recessed

Recessed Mounted 8W Spot LED Luminaire

3303459 LUP 008U 40LN00 36 LLL 20 180 FLP

Dimensions (mm)

	Ø	h
Standart	85	180

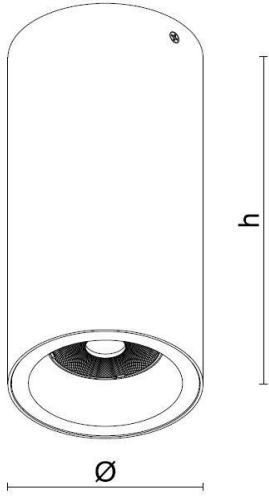

Weight (kg)

Standard	0.660
----------	-------

Ø	h	Standart Driver	DAU
85	120	Yes	No
	180	Yes	Yes
	240	Yes	Yes
	300	Yes	Yes

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 10.08.2023