



## LUP Recessed

Recessed Mounted 14W Spot LED Luminaire

Order Code : 3303447  
Product Code : LUP 014U 40LN00 36 LLL 20 120 FLP



### Product Data

#### Standard Features


Housing	: Aluminium Housing
Optic	: 36° Lens
Ceiling Type	: Ceiling Mounted
IP Grade	: IP20
Installation	: Surface Mounted
Light Source	: COB LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 14W
Final Luminous Flux	: 1512 lm
Efficacy	: 108 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

### Photometric Curve

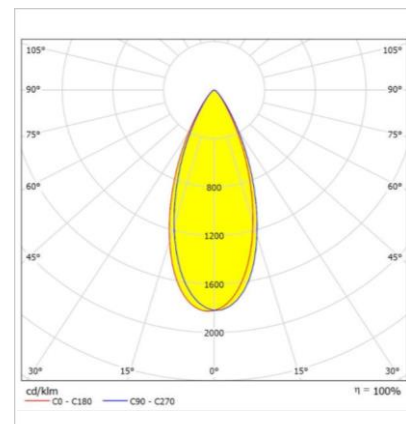

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 72.000 hours @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: None
DALI Option	: None
Degree Option	: 24° / 60°


# LUP Recessed

Recessed Mounted 14W Spot LED Luminaire

3303447 LUP 014U 40LN00 36 LLL 20 120 FLP

## Dimensions (mm)

	Ø	h
Standart	85	120

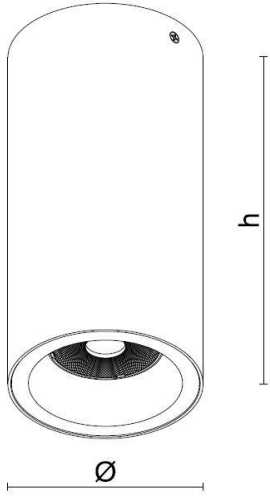

## Weight (kg)

Standard	0.550
----------	-------

Ø	h	Standart Driver	DAU
85	120	Yes	No
	180	Yes	Yes
	240	Yes	Yes
	300	Yes	Yes

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 10.08.2023