



STORM

SURFACE MOUNTED ADJ

36 W Spot LED Luminaire

Order Code : 3294793
Product Code : STO 036U 40SD00 24 4K2 ADJ FLP



Product Data

Standard Features


| | |
|--------------------|-------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° Reflector |
| Ceiling Type | : Plasterboard |
| IP Grade | : IP20 |
| Installation | : Surface Mounted |
| Light Source | : COB LED |
| Electronic Control | : On/Off |

Optical & Electrical Features

| | |
|------------------------------|--------------------|
| Power Consumption | : 36 W |
| Final Luminous Flux | : 4176 lm |
| Efficacy | : 116 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : Cos ϕ > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

* There is \pm 10% Tolerance in Technical Values.

Photometric Curve

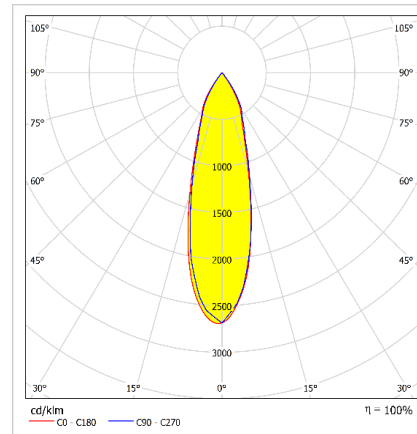

Other Features & Conditions

| | |
|-----------------------------|--------------------------|
| Operating Temperature Range | : -5 °C / +35 °C |
| Impact Resistance | : IK03 |
| Led Life Time - L70 | : 72.000 saat @Ta= 35 °C |


Optional Features

| | |
|-------------------------------|-------------------------|
| Correlated Color Temperatures | : 2700K / 3000K / 6500K |
| Emergency Kit Options | : No |
| DALI Option | : Yes |
| Degree Option | : 40° |

STORM SURFACE MOUNTED ADJ

36 W Spot LED Luminaire

3294793 STO 036U 40SD00 24 4K2 ADJ FLP

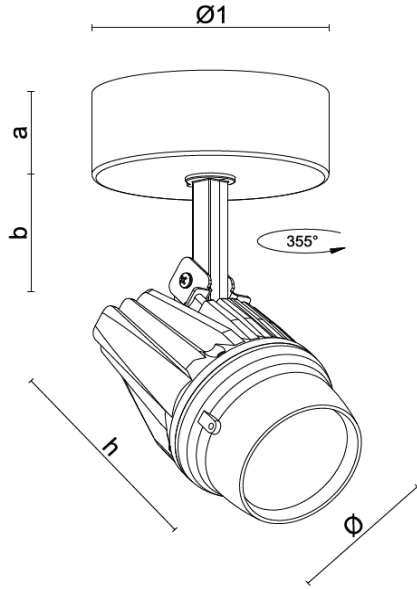

Dimensions (mm)

| | a | b | h | Ø | Ø1 |
|----------|----|----|-----|----|-----|
| Standard | 50 | 48 | 138 | 90 | 120 |

Weight (kg)

| | |
|----------|-------|
| Standart | 1.360 |
|----------|-------|



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 11.03.2024

