



GIZA V.2 IP65

Surface Mounted 12W Spot LED Luminaire

Order Code : 3293032
Product Code : GZA 012U 40LN00 80 1K1 65 FLP



Product Data

Standard Features


| | |
|--------------------|------------------------|
| Housing | : Aluminium Housing |
| Optic | : 80° Lens + Reflector |
| Ceiling Type | : Plasterboard |
| IP Grade | : IP65 |
| Installation | : Surface Mounted |
| Light Source | : Mid Power LED |
| Electronic Control | : On/Off |

Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 12W |
| Final Luminous Flux | : 1142 lm |
| Efficacy | : 95,1 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : Cos Ø > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

* There is ± 10% Tolerance in Technical Values.

Photometric Curve

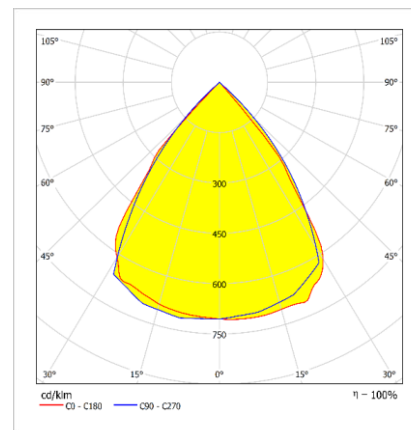

Other Features & Conditions

| | |
|-----------------------------|-----------------------------|
| Operating Temperature Range | : -5 °C / +35 °C |
| Impact Resistance | : IK03 |
| Led Life Time - L70 | : > 72.000 hours @Ta= 35 °C |


Optional Features

| | |
|-------------------------------|-------------------------|
| Correlated Color Temperatures | : 2700K / 3000K / 6500K |
| Emergency Kit Options | : No |
| DALI Option | : Yes |
| Degree Option | : 50° |

GIZA V.2 IP65

Surface Mounted 12W LED Luminaire

3293032 GZA 012U 40LN00 80 1K1 65 FLP

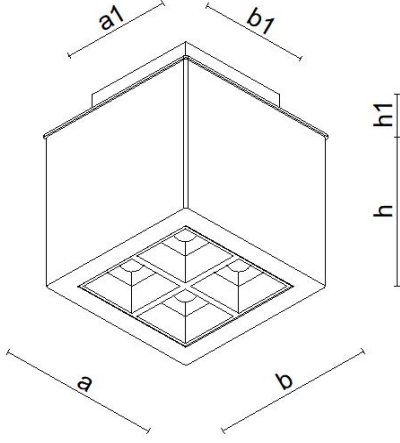

Dimensions (mm)

| | a X b | a1 X b1 | h | h1 |
|----------|-----------|---------|-----|----|
| Standard | 105 x 105 | 70 X 70 | 100 | 20 |

Weight (kg)

| | |
|----------|-------|
| Standard | 1.450 |
|----------|-------|



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 03.11.2023