



GIZA V.2 IP65

Surface Mounted 28W Spot LED Luminaire

Order Code : 3293047
Product Code : GZA 028U 40LN00 50 2K8 65 FLP



Product Data

Standard Features


Housing	: Aluminium Housing
Optic	: 50° Lens + Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP65
Installation	: Surface Mounted
Light Source	: SMD LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 28W
Final Luminous Flux	: 2807 lm
Efficacy	: 100,2 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is ± 10% Tolerance in Technical Values.

Photometric Curve

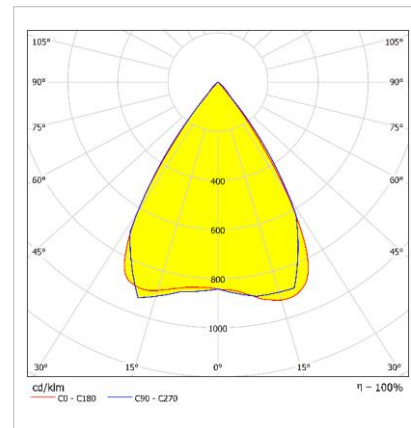

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 72.000 hours @Ta= 35 °C


Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes
Degree Option	: 80°

GIZA V.2 IP65

Surface Mounted 28W LED Luminaire

3293047 GZA 028U 40LN00 50 2K8 65 FLP

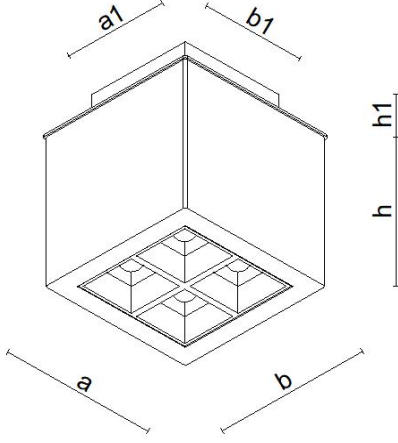

Dimensions (mm)

	a X b	a1 X b1	h	h1
Standard	105 x 105	70 X 70	100	20

Weight (kg)

Standard	1.450
----------	-------



- EAE, reserves the right to make changes without prior notice.



Revision date: 16.02.2023