




## Surface Mounted 15 W Spot LED Luminaire



Housing	: Aluminium Housing
Optic	: 50° Lens + Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP65
Installation	: Surface Mounted
Light Source	: SMD LED
Electronic Control	: On/Off

Power Consumption	: 14,7 W
Final Luminous Flux	: 1443,5 lm
Efficacy	: 98.2 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80


## Photometric Curve



## GIZA V.2 IP65

### Surface Mounted 15W LED Luminaire

3293035 GZA 015U 40LN00 50 1K3 65 FLP

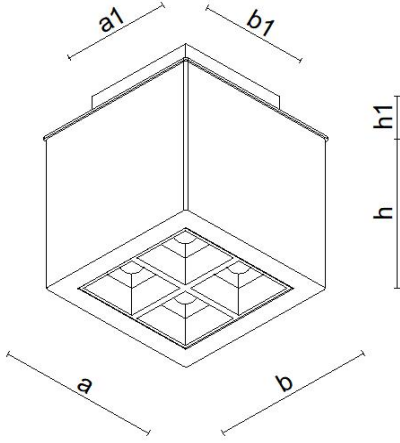

#### Dimensions (mm)

	a X b	a1 X b1	h	h1
Standard	105 x 105	70 X 70	100	20

#### Weight (kg)

Standard	1.450
----------	-------



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 16.02.2023