



GIZA V.2 IP65

Surface Mounted 15 W Spot LED Luminaire

Order Code : 3293036
Product Code : GZA 015U 40LN00 80 1K3 65 FLP



Product Data

Standard Features


Housing	: Aluminium Housing
Optic	: 80° Lens + Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP65
Installation	: Surface Mounted
Light Source	: SMD LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 14,7 W
Final Luminous Flux	: 1443,5 lm
Efficacy	: 98.2 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is ± 10% Tolerance in Technical Values.

Photometric Curve

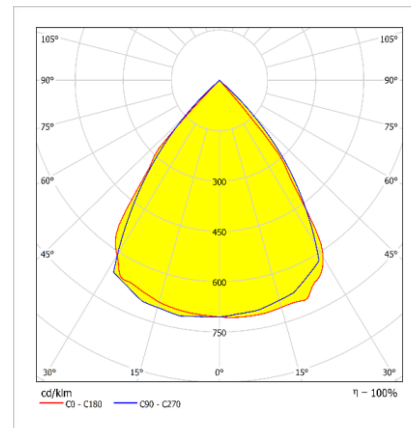

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 72.000 hours @Ta= 35 °C


Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes
Degree Option	: 50°

GIZA V.2 IP65

Surface Mounted 15 W LED Luminaire

3242033 GZA 015U 40LN00 80 1K3 65 FLP

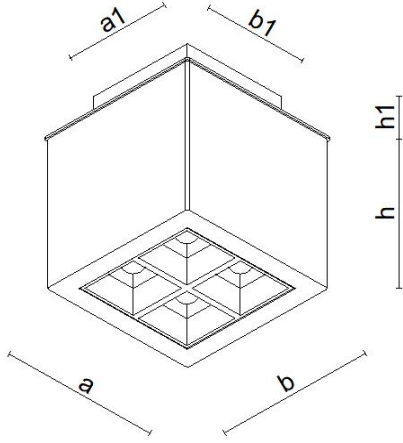

Dimensions (mm)

	a X b	a1 X b1	h	h1
Standard	105 x 105	70 X 70	100	20

Weight (kg)

Standard	1.450
----------	-------



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 16.02.2023