




Surface Mounted 12W Spot LED Luminaire



Housing	: Aluminium Housing
Optic	: 50° Lens + Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP65
Installation	: Surface Mounted
Light Source	: SMD LED
Electronic Control	: On/Off

Power Consumption	: 12W
Final Luminous Flux	: 1142 lm
Efficacy	: 95,1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80


Photometric Curve



GIZA V.2 IP65

Surface Mounted 12W LED Luminaire

3293031 GZA 012U 40LN00 50 1K1 65 FLP

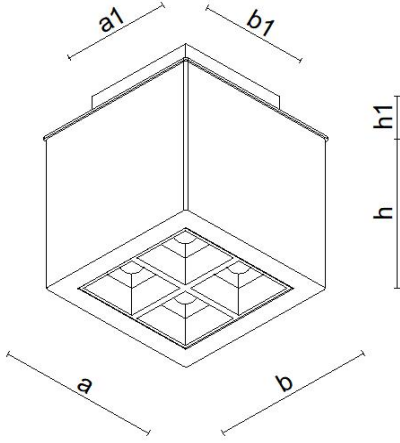

Dimensions (mm)

	a X b	a1 X b1	h	h1
Standard	105 x 105	70 X 70	100	20

Weight (kg)

Standard	1.450
----------	-------

- EAE, reserves the right to make changes without prior notice.



Revision date: 16.02.2023