



## GIZA V.2 IP65

Surface Mounted 24W Spot LED Luminaire

Order Code : 3293044  
Product Code : GZA 024U 40LN00 80 2K4 65 FLP



### Product Data

#### Standard Features


Housing	: Aluminium Housing
Optic	: 80° Lens + Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP65
Installation	: Surface Mounted
Light Source	: SMD LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 24W
Final Luminous Flux	: 2410 lm
Efficacy	: 100,4 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

### Photometric Curve

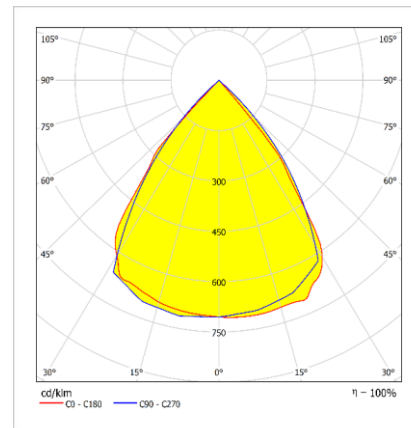

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 72.000 hours @Ta= 35 °C


#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes
Degree Option	: 50°

## GIZA V.2 IP65

Surface Mounted 24W LED Luminaire

3293044 GZA 024U 40LN00 80 2K4 65 FLP

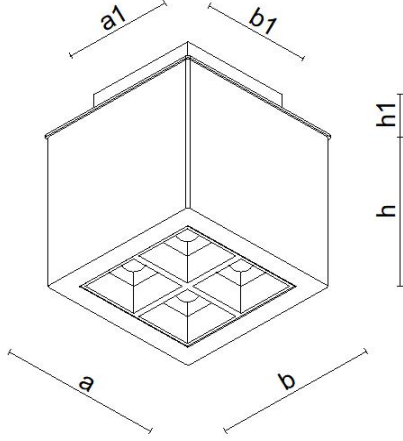

### Dimensions (mm)

	a X b	a1 X b1	h	h1
Standard	105 x 105	70 X 70	100	20

### Weight (kg)

Standard	1.450
----------	-------



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 16.02.2023