



## LORY FLAT IP65 YV

Recessed Mounted 10 W Spot LED Luminaire

Order Code : 3275031  
Product Code : LRY 010A 40CM00 36 984 65 FL YV FLP



### Product Data

#### Standard Features


Housing	: Aluminium Housing
Optic	: 36° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP65
Installation	: Recessed Mounted
Light Source	: COB LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 10 W
Final Luminous Flux	: 984 lm
Efficacy	: 98.4 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\*There is ±%10 tolerance in the technical values.

### Photometric Curve

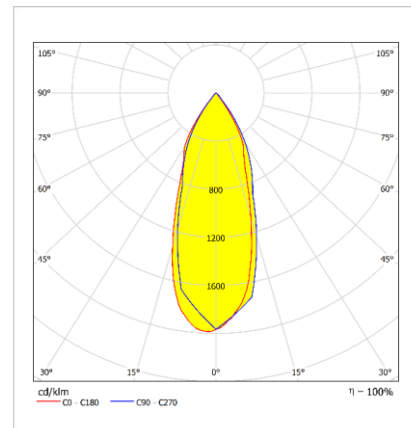

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes
Degree Option	: 24° / 60°



## LORY FLAT IP65 YV

Recessed Mounted 10 W Spot LED Luminaire

3275031 LRY 010A 40CM00 36 984 65 FL YV FLP

### Dimensions (mm)

	ø	h	øD
Standard	89	80	78






### Weight (kg)

Standard



On-Off Driver / DALI Driver  
IP65 Box

On-Off Driver / DALI Driver +  
Emergency Kit IP65 Box

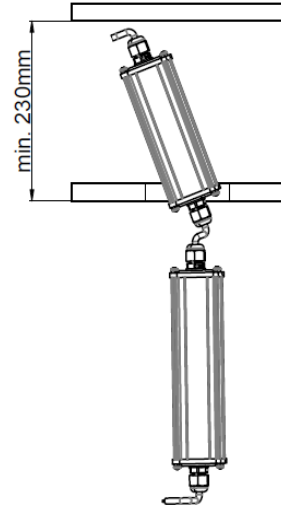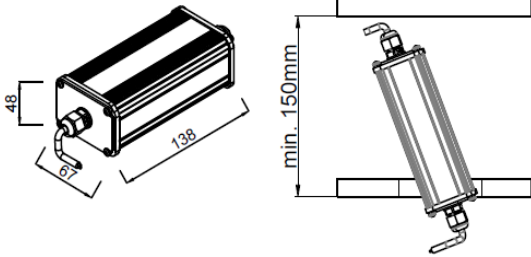

• EAE, reserves the right to make changes without prior notice.

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision date:

26.02.2024

**engineering the light**

FLP IS A EAE BRAND

