



BRICK

Recessed Mounted

Recessed Mounted 12 W Spot LED Luminaire

Order Code : 3165066
Product Code : ESP 012A 40OD00 35 LLL 20 BR V.2 2X FLP



Product Data

Standard Features


Housing	: Aluminium housing
Diffuser	: 35° Reflector
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 12 W
Final Luminous Flux	: 1317 lm
Efficacy	: 109,75 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is ± 10% Tolerance in Technical Values.

Photometric Curve

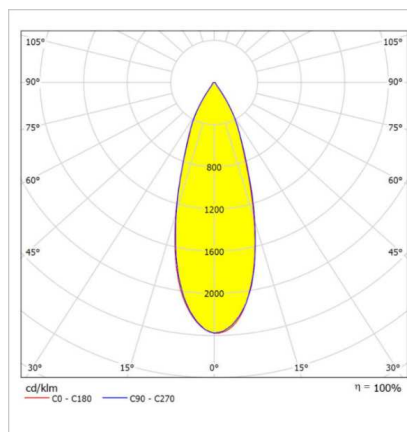

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Impact Resistance	: IK02
LED Life Time - L70	: > 50.000 hours @Ta= 35 °C


Optional Features

Correlated Color Temperatures	: 3000K / 6500K
DALI Option	: Yes
Degree Option	: 15° / 50°

BRICK Recessed Mounted



Recessed Mounted 12 W Spot LED Luminaire

3165066 ESP 012A 40OD00 35 LLL 20 BR V.2 2X FLP

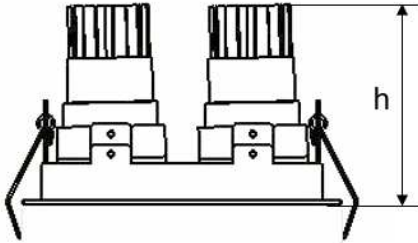

Dimensions (mm)

	a	b	h	d ¹ , d ²
Standard	162	90	103	147x73

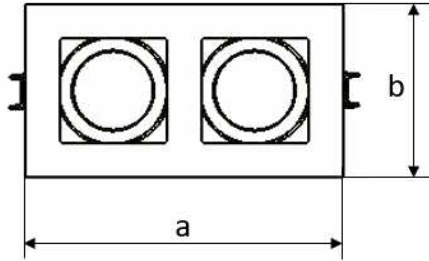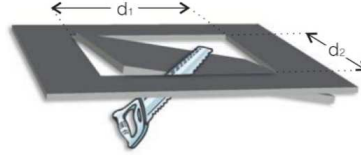

- EAE, reserves the right to make changes without prior notice.

 **engineering the light**

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) F:
www.eaeaydinlatma.com.tr

Revision date: 24.03.2021