




### Recessed Mounted 18 W Spot LED Luminaire



## Photometric Curve

Housing	: Aluminium housing
Diffuser	: 35° Reflector
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

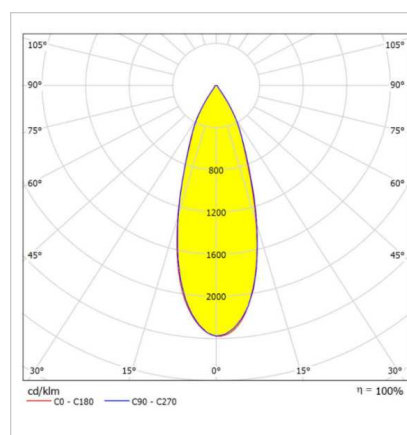

Power Consumption	: 18 W
Final Luminous Flux	: 1975,5 lm
Efficacy	: 109,75 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is  $\pm 10\%$  Tolerance in Technical Values.

Operating Temperature Range : -5 °C / +35 °C  
Impact Resistance : IK02  
Led Life Time - L70 : > 50.000 hours @Ta= 35 °C

Correlated Color Temperatures : 3000K / 6500K


DALI Option : Yes

Degree Option : 15° / 50°

# BRICK Recessed Mounted



## Recessed Mounted 18 W Spot LED Luminaire

3188127 ESP 018A 40OD00 35 LLL 20 BR V.2 2X FLP

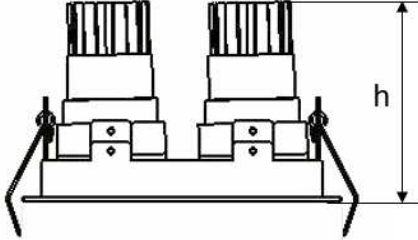

### Dimensions (mm)

	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Standard	162	90	103	147x73

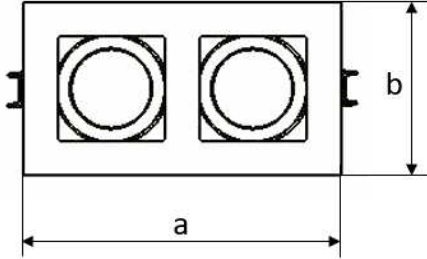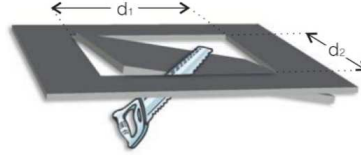

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) F:  
www.eaeaydinlatma.com.tr

Revision date: 24.03.2021