



DOWNLED IP65 Surface Mounted 6" V.2

20 W Spot LED Lighting Luminaire

Order Code : 3233927
Product Code : DWL 020U 40OD00 1K7 65 06 V.2 FLP



Product Data

Standard Features

Housing	: Aluminium Housing
Optic	: Recessed Opal Diffuser
IP Grade	: IP65
Installation	: Surface Mounted
Light Source	: SMD LED
Electronic Control	: On-Off


Optical & Electrical Features

Power Consumption	: 20 W
Final Luminous Flux	: 1696 lm
Efficacy	: 84.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -5°C / +35°C
Impact Resistance	: IK03
LED Life Time - L70	: > 72.000 saat @Ta= 35 °C

Photometric Curve

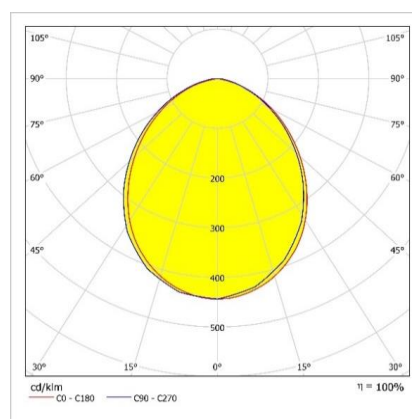

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes
Degree Option	: 36° / 60°


DOWNLED IP65 Surface Mounted 6" V.2

20 W Spot LED Lighting Luminaire

3233927 DWL 020U 40OD00 1K7 65 06 V.2 FLP

Dimensions (mm)

	Ø	h
Surface Mounted	187	180

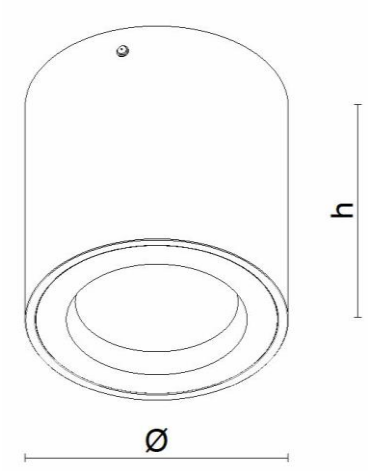

Weight (kg)

Standard

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision date: 08.02.2023