



BELLA 1X

Surface Mounted 10 W Spot LED Luminaire

Order Code : 3249427
Product Code : BLL 010U 40SD00 36 1K2 20 1X FLP



Product Data

Standard Features


| | |
|--------------------|---------------------|
| Housing | : Aluminium housing |
| Optic | : 36° Reflector |
| Ceiling Type | : Plasterboard |
| IP Grade | : IP20 |
| Installation | : Surface Mounted |
| Light Source | : COB LED |
| Electronic Control | : On-Off |

Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 10 W |
| Final Luminous Flux | : 1060 lm |
| Efficacy | : 106 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : Cos Ø > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

*There is ±%10 tolerance in the technical values.

Photometric Curve

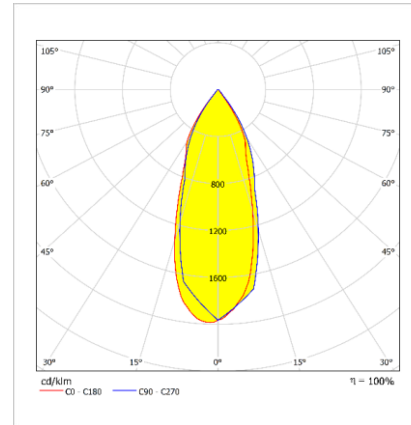

Other Features & Conditions

| | |
|-----------------------------|--------------------------|
| Operating Temperature Range | : -5 °C / +35 °C |
| Impact Resistance | : IK03 |
| Led Life Time - L70 | : 72.000 saat @Ta= 35 °C |

Optional Features

| | |
|-------------------------------|-------------------------|
| Correlated Color Temperatures | : 2700K / 3000K / 6500K |
| Emergency Kit Options | : None |
| DALI Option | : Yes |
| Degree Option | : 24° / 60° |


BELLA 1X

Surface Mounted 10 W Spot LED Luminaire

3249427 BLL 010U 40SD00 36 1K2 20 1X FLP

Dimensions (mm)

| | a | b | h |
|----------|-----|-----|-----|
| Standart | 100 | 100 | 130 |

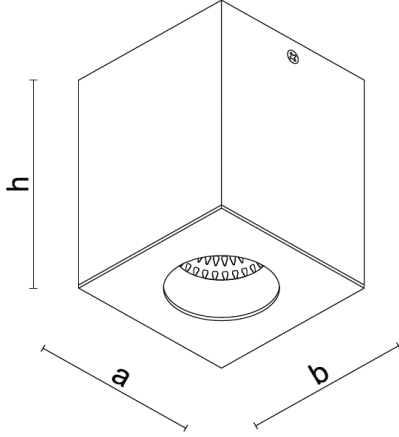

Weight (kg)

| | |
|----------|-------|
| Standard | 1.100 |
|----------|-------|



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision date: 02.12.2022