



# EXIT PLEK MAXI TY

8 W Emergency Lighting LED Luminaire

Order Code : 3290497  
 Product Code : EXT 008U 65TY02 0K8 20 PLK MX FLP



## Product Data

### Standard Features

Housing	: Sheet Steel Casing
Cover	: Acrylic Opal Diffuser
IP Grade	: IP20
Installation	: Surface Mounted / pendant
Light Source	: Mid Power LED
Emergency Kit Options	: 3 Hours
Run Mode	: Maintained

### Optical & Electrical Features


Power Consumption (Maintained)	: 8 W
Final Luminous Flux	: 800 lm
Efficacy	: 100 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos $\phi$ > 0,9
Correlated Color Temperature	: 6500K
Color Rendering Index	: >80
Charge Duration	: 48 hours
Visibility Range	: 60m

\* There is  $\pm$  10% Tolerance in Technical Values.

### Other Features & Conditions

Operating Temperature Range With Emergency Kit	: +10 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 50.000 hours @Ta= 35 °C

## Photometric Curve

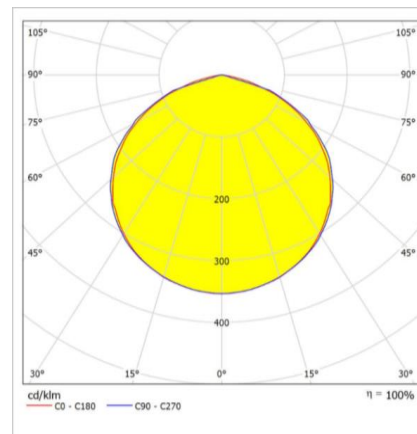


### Emergency Kit Status

Power Consumption (Non Maintained)	: 2 W
Final Luminous Flux	: 200 lm
Dali ( Option )	: Yes
Run Mode	: Non maintained

# EXIT PLEK MAXI TY

8 W Emergency Direction LED Luminaire

3290497 EXT 008U 65TY02 0K8 20 PLK MX FLP

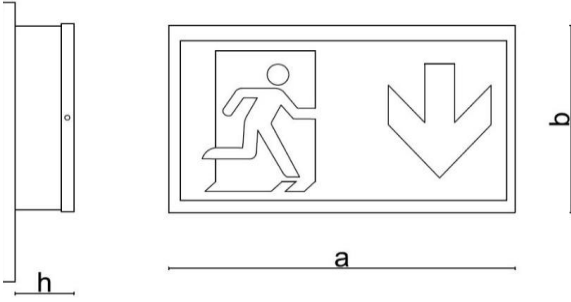


## Dimensions (mm)

	a	b	h
Standard	610	400	55
Flag	608	398	-




## Weight (kg)

Standard	3.500
----------	-------

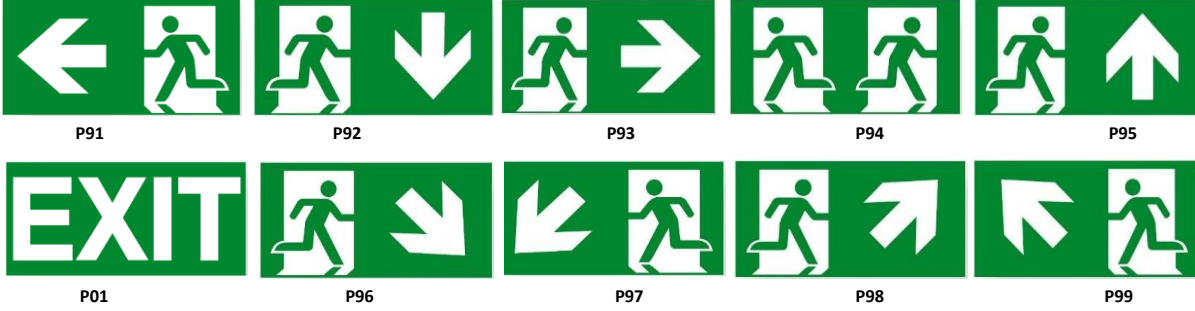


## Visibility Distance

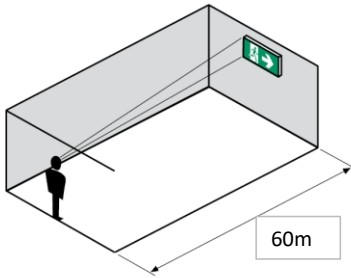

L Wall Mounting Set 500x140cm

Order Code : 3333359

Product Code : EXIT PLK MX DUVAR MNTJ APARATI FLP

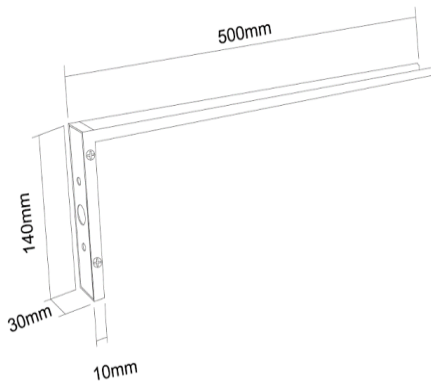

- The device needs to be charged and discharged for 48 hours twice. After the third 48-hour charge, it will run for 3 hours.
- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision Date: 1.12.2023