



D-BAR FLP

10 W Linear Facade LED Lighting Luminaire

Order Code : 3253607
Product Code : DBA 010G 40OD28 LLL 100 V.2 FLP



Product Data

Standard Features


Housing	: UV Protection Polycarbonate / Grey
Diffuser	: 126° UV Protection Polycarbonate
IP Grade	: IP66
Installation	: Cove Lighting / Surface Mounted
Light Source	: SMD LED

Optical & Electrical Features

Power Consumption	: 10 W
Final Luminous Flux	: 517 lm
Efficacy	: 51,7 lm / W
Input Voltage	: 24 V DC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >70

*There is ±%10 tolerance in the technical values.

Photometric Curve

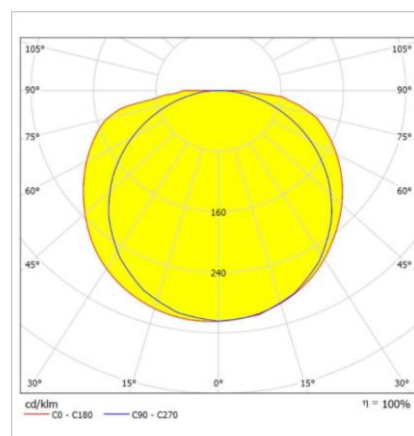

Other Features & Conditions

Operating Temperature Range	: -25°C / 45°C
Impact Resistance	: IK10
Led Life Time - L70	: > 100.000 hours @Ta= 45 °C

Optional Features

Correlated Color Temperatures	: 3000K / 6500K
-------------------------------	-----------------

D-BAR FLP

10 W Linear Facade LED Lighting Luminaire

3253607 DBA 010G 40OD28 LLL 100 V.2 FLP

Dimensions (mm)

	a	b	h
30cm	29,5	300	48
40cm	29,5	400	48
50cm	29,5	500	48
60cm	29,5	600	48
100cm	29,5	1000	48
150cm	29,5	1500	48

Note : It shall be supplied with a maximum 10 meters of D-BAR with a power source to a single direction from a single point.





Power Supply

max 10mt

Ağırlık (gr)

100cm

300

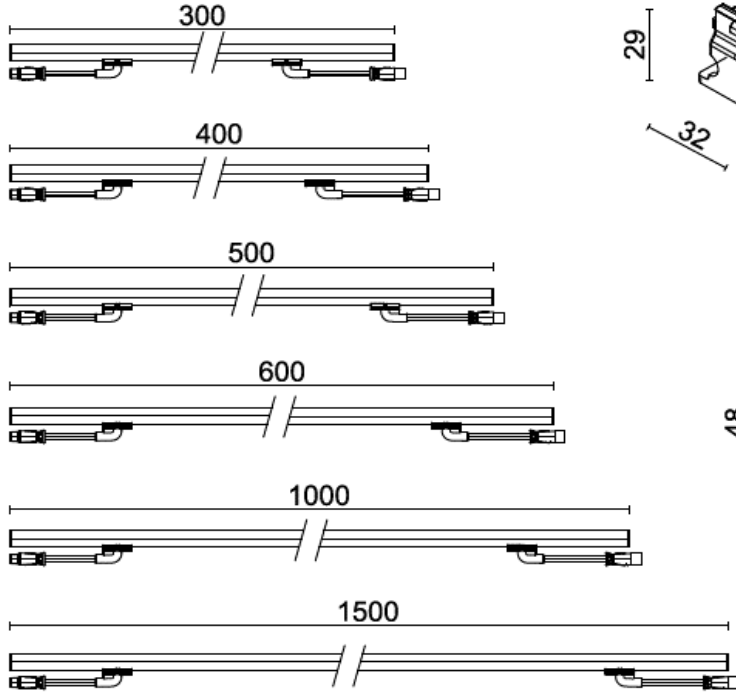

D-Bar Driver

1041769 DRV 100W MNW 24V XLG IP67
1041770 DRV 150W MNW 24V XLG IP67
1027540 DRV 75W MNW 24V XLG IP67

Connector:

3253609 DBA AC KONNEKTOR 1M FLP



End Cup Male:

3337161 DBA ERKEK SONLANDIRMA KAPAGI FLP



• EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision date:

12.06.2024

FLP IS A EAE BRAND

