



Pendant 20 W Spot LED Luminaire

[illegible]


Photometric Curve

Power Consumption	: 20 W
Final Luminous Flux	: 2420 lm
Efficacy	: 121 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ tolerance in Technical Values.

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes
Degree Option	: 24° / 60°

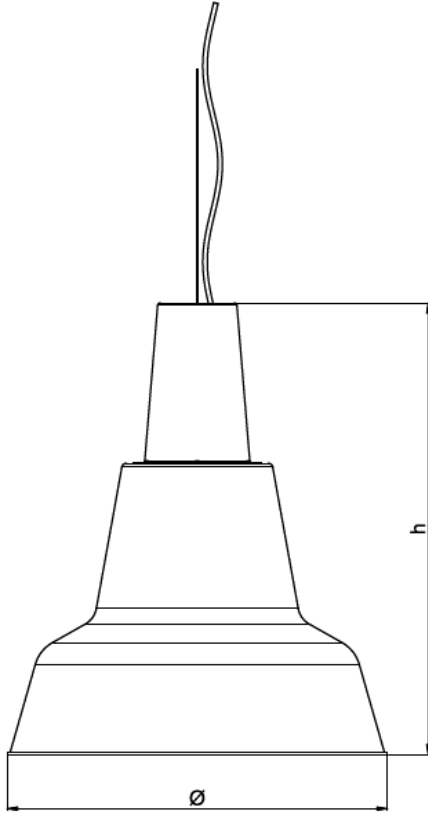

ATLANTIS MIDI

Pendant 20 W Spot LED Luminaire

3202490 ATS 020S 40SD00 40 2K4 20 FLP MD

Dimensions (mm)

	Ø	h
Standart	505	660

Weight (kg)

Standard	3,7
----------	-----



Images



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TÜRKİYE

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision date: 13.02.2023