



## ROUND FLAT

Recessed Mounted 6 W Spot LED Luminaire

Order Code : 3217053  
Product Code : RND 006A 40SD00 36 636 3 YV FL FLP



### Product Data

#### Standard Features


Housing	: Aluminium Injection Housing
Diffuser	: 36° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed Mounted
Light Source	: COB LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 6 W
Final Luminous Flux	: 636 lm
Efficacy	: 106 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

### Photometric Curve

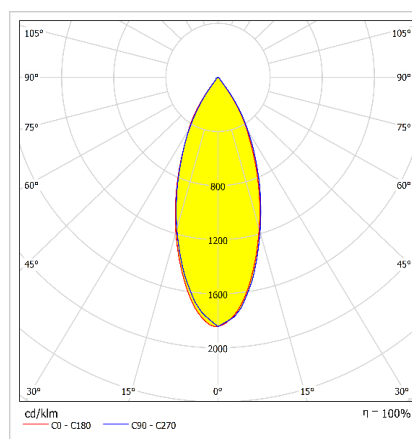

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes
Degree Option	: 24° / 60°



# ROUND FLAT

Recessed Mounted 6 W Spot LED Luminaire

3217053 RND 006A 40SD00 36 636 3 YV FL FLP

## Dimensions (mm)

	$\emptyset$	h	$\emptyset D$
Standard	87	95	76



## Weight (kg)

Standard	0.250
----------	-------



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revizyon tarihi: 27.09.2023