



ROUND FLAT

Recessed Mounted 6 W Spot LED Luminaire

Order Code : 3217197
Product Code : RND 006A 40SD00 36 636 6 YV FL FLP



Product Data

Standard Features


| | |
|--------------------|-------------------------------|
| Housing | : Aluminium Injection Housing |
| Diffuser | : 36° Reflector |
| Ceiling Type | : Plasterboard |
| IP Grade | : IP20 |
| Installation | : Recessed Mounted |
| Light Source | : COB LED |
| Electronic Control | : On/Off |

Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 6 W |
| Final Luminous Flux | : 636lm |
| Efficacy | : 106 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : Cos Ø > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

* There is ± 10% Tolerance in Technical Values.

Photometric Curve

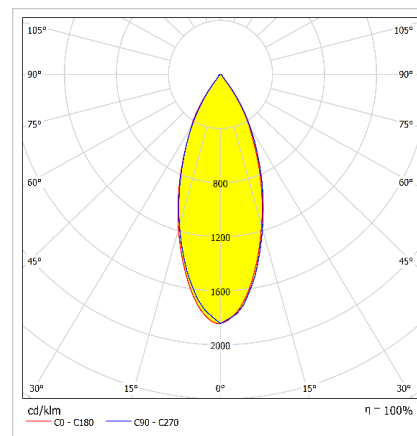

Other Features & Conditions

| | |
|--|--------------------------|
| Operating Temperature Range | : -5 °C / +35 °C |
| Operating Temperature Range With Emergency Kit | : +5 °C / +35 °C |
| Impact Resistance | : IK03 |
| Led Life Time - L70 | : 72.000 saat @Ta= 35 °C |

Optional Features

| | |
|-------------------------------|-------------------------|
| Correlated Color Temperatures | : 2700K / 3000K / 6500K |
| Emergency Kit Options | : 1 / 3 Hours |
| DALI Option | : Yes |
| Degree Option | : 24° / 60° |



ROUND FLAT

Recessed Mounted 6 W Spot LED Luminaire

3217197 RND 006A 40SD00 36 636 6 YV FL FLP

Dimensions (mm)

| | \emptyset | h | $\emptyset D$ |
|----------|-------------|-----|---------------|
| Standart | 169 | 105 | 152 |

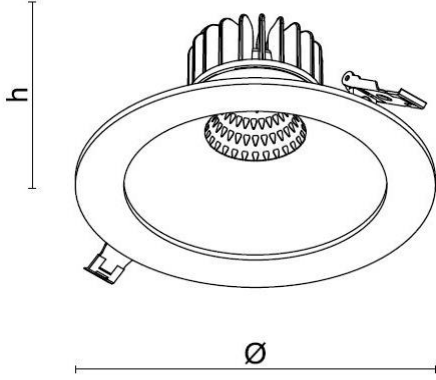

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revizyon tarihi: 28.09.2023