



## EXIT PLEK MIDI TY

3 W Emergency Lighting LED Luminaire

Order Code : 3295466  
 Product Code : EXT 003U 65TY02 240 20 PLK MD FLP




### Product Data

#### Standard Features

Housing	: Sheet steel casing
Cover	: Acrylic opal diffuser
IP Grade	: IP20
Installation	: Surface mounted / pendant
Light Source	: Mid power LED
Emergency Kit Options	: 3 hours
Run Mode	: Maintained

### Photometric Curve

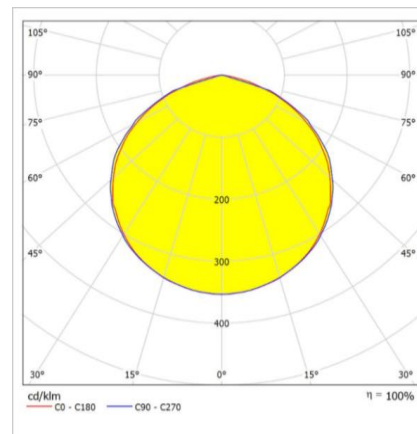

#### Optical & Electrical Features

Power Consumption (Maintained) : 3 W

Final Luminous Flux	: 270 lm
Efficacy	: 90 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 6500K
Color Rendering Index	: >80
Charge Duration	: 48 hours
Visibility Range	: 40m

\* There is  $\pm 10\%$  Tolerance in Technical Values.

#### Other Features & Conditions

Operating Temperature Range With Emergency Kit	: +10 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 50.000 hours @Ta= 35 °C


#### Emergency Kit Status

Power Consumption (Non Maintained)	: 2 W
Final Luminous Flux	: 180 lm
Dali ( Option )	: Yes
Run Mode	: Non maintained

# EXIT PLEK MIDI TY

3 W Emergency Direction LED Luminaire

3295466 EXT 003U 65TY02 240 20 PLK MD FLP

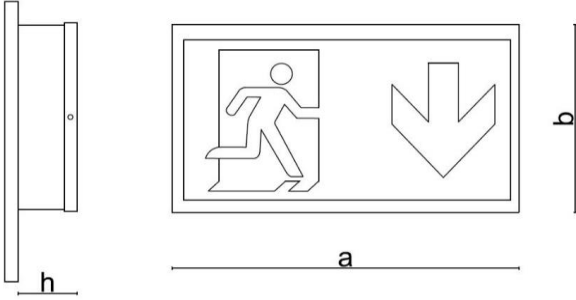


## Dimensions (mm)

	a	b	h
Standard	420	220	55
Flag	408	208	-




## Weight (kg)

Standard	1,50
----------	------

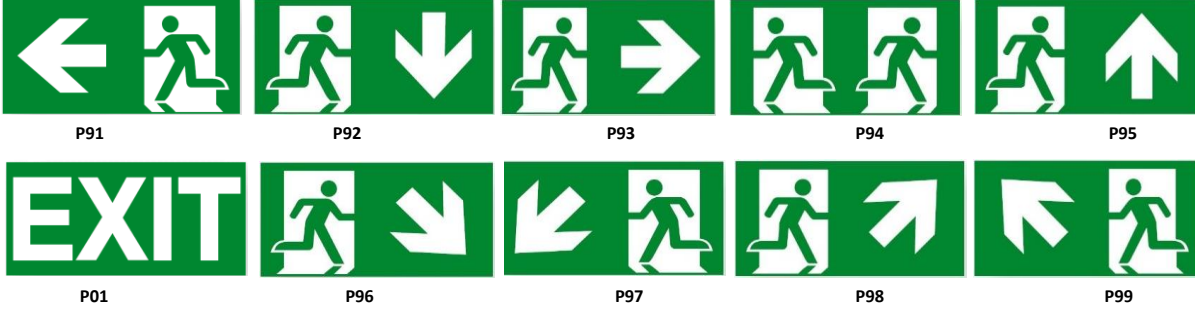

## Suspension Set

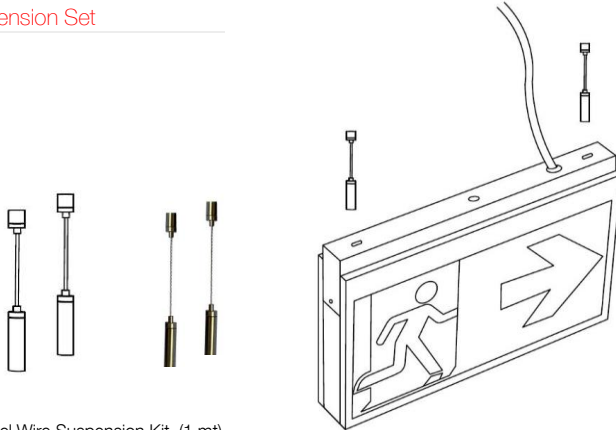


Steel Wire Suspension Kit (1 mt)


Order Code : 3241728

Product Code : EXT TRC ASKI TAKIM FLP

## Visibility Distance

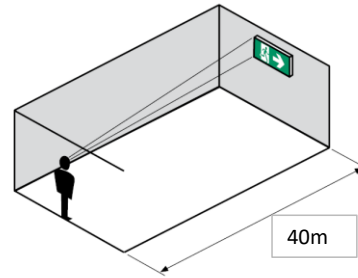

- The device needs to be charged and discharged for 48 hours twice. After the third 48-hour charge, it will run for 3 hours.
- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision Date: 4.12.2023