



## Recessed Mounted 14 W Spot LED Luminaire



## Photometric Curve

Power Consumption	: 14 W
Final Luminous Flux	: 1370 lm
Efficacy	: 97.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

Correlated Color Temperatures	: 2700 / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 24°



## ORI-Y MINI

Recessed Mounted 14 W Spot LED Luminaire

3238716 ORI 014A 40SD00 36 1K4 20 MN YV FLP

### Dimensions (mm)

	Ø	h	ØD
Standard	85	115	76

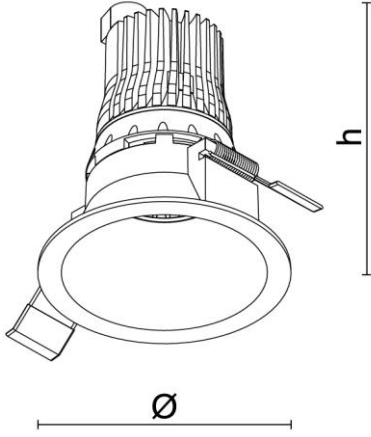

### Weight (kg)

Standard	0.290
----------	-------

- EAE, reserves the right to make changes without prior notice.

*engineering the light*

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 04.07.2023