



GIZA V.2

Surface Mounted 10 W LED Luminaire

Order Code : 3241994
Product Code : GZA 010U 40LN00 50 1K1 20 FLP



Product Data

Standard Features


Housing	: Aluminium housing
Optic	: 50° Lens + Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Surface Mounted
Light Source	: SMD LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 10 W
Final Luminous Flux	: 1076 lm
Efficacy	: 107.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Photometric Curve

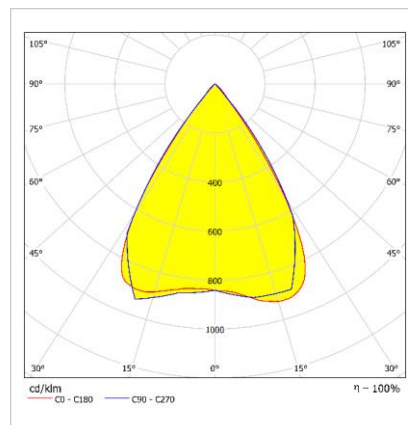

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 72.000 hours @Ta= 35 °C

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: None
DALI Option	: Yes
Degree Option	: 80°


GIZA V.2

Surface Mounted 10 W LED Luminaire

3241994 GZA 010U 40LN00 50 1K1 20 FLP

Dimensions (mm)

	a	b	h
Standard	105	105	100

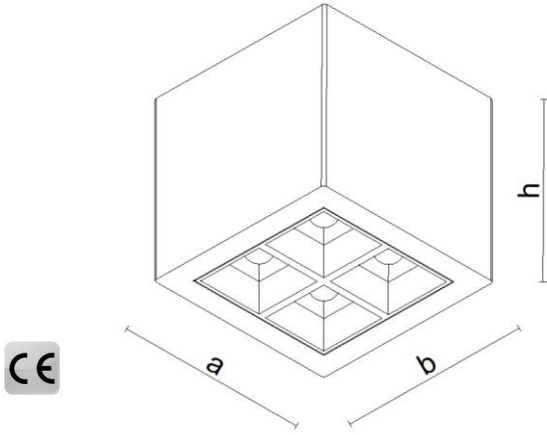

Weight (kg)

Standard	1.300
----------	-------

- EAE, reserves the right to make changes without prior Nonetice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 13.10.2022