



DOWNLED Ø225

Recessed Mounted 30 W Spot LED
Lighting Luminaire

Order Code : 3254782
Product Code : DWL 030A 40PC00 3K4 08 20 V.2 FLP



Product Data

Standard Features

| | |
|--------------------|------------------------|
| Housing | : Aluminum Housing |
| Optic | : Opal Diffuser |
| Ceiling Type | : Plasterboard |
| IP Grade (Housing) | : IP40 |
| Installation | : Recessed Mounted |
| Light Source | : SMD LED |
| Electronic Control | : On/Off (IP20 Driver) |

Optical & Electrical Features


| | |
|------------------------------|----------------|
| Power Consumption | : 30 W |
| Final Luminous Flux | : 3343 lm |
| Efficacy | : 111,45 |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

* There is $\pm 10\%$ Tolerance in Technical Values.

Other Features & Conditions

| | |
|---|--------------------------|
| Operating Temperature Range | : -5 °C / +35 °C |
| Operating Temperature Range With Emergency Kit | : +5 °C / +35 °C |
| Impact Resistance | : IK03 |
| LED Life Time - L70 | : 72.000 saat @Ta= 35 °C |

Photometric Curve

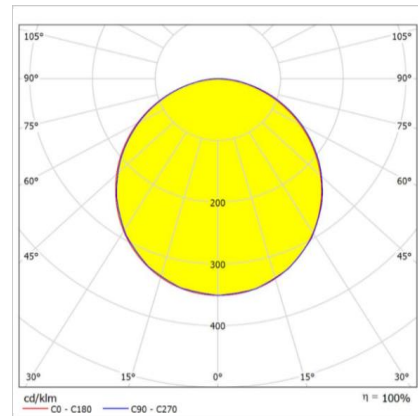

Optional Features

| | |
|----------------------------------|-----------------|
| Correlated Color Temperatures | : 3000K / 6500K |
| Emergency Kit Options | : 1 / 3 Hours |
| DALI Option | : Yes |



DOWNLED Ø225

Recessed Mounted 30 W Spot LED Lighting Luminaire

3254782 DWL 030A 40PC00 3K4 08 20 V.2 FLP

Dimensions (mm)

| | Ø | h | Ø D |
|------------------|-----|----|-----|
| Recessed Mounted | 225 | 35 | 210 |

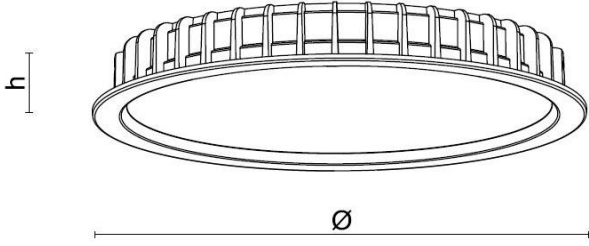

Weight (kg)

| | |
|----------|-------|
| Standard | 0.600 |
|----------|-------|

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 9.02.2024

