

## BRICK V.2 Surface Mounted

Surface Mounted 6 W Spot LED Luminaire

Order Code : 3274416  
Product Code : BRK 006U 40SD00 36 0K7 V.2 FLP



### Product Data

#### Standard Features


Housing	: Aluminium housing
Optic	: 36° Reflector
Ceiling Type	: Surface mounted
IP Grade	: IP20
Installation	: Surface mounted
Light Source	: COB LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 6 W
Final Luminous Flux	: 692 lm
Efficacy	: 115 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

### Photometric Curve

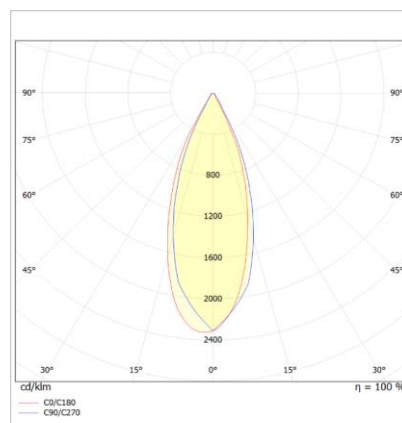

#### Other Features & Conditions

Operating Temperature Range	: -5°C / +35 °C
Impact Resistance	: IK03
LED Life Time - L70	: > 72.000 hours @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: None
DALI Option	: Yes
Degree Option	: 24° / 36°

## BRICK V.2 Surface Mounted

Recessed Mounted 6 W Spot LED Luminaire



3274416 BRK 006U 40SD00 36 0K7 V.2 FLP

### Dimensions (mm)

	a	b	h
Standart	80	80	200

### Weight (kg)

Standard	0.900
----------	-------

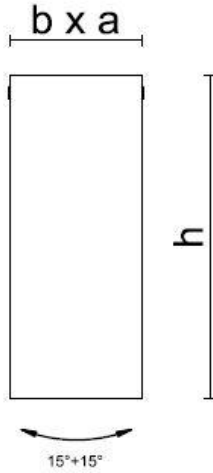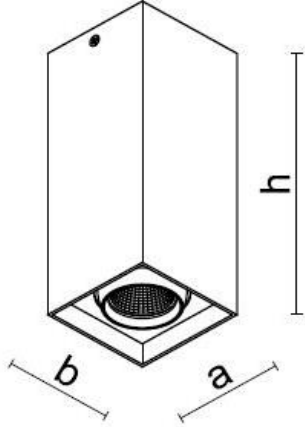

- EAE, reserves the right to make changes without prior notice.

*engineering the light*

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 09.12.2022