



Emergency Lighting ARIOSTE

5 W Emergency Lighting LED Luminaire

Order Code : 3164884
Product Code : EXT 005U 65SD02 1K4 65 ARI YUASA FLP



Product Data

Standard Features


Housing	: Thermoplastic housing
IP Grade	: IP65
Installation	: Surface mounted
Light Source	: Mid power LED
Emergency Kit	: Yuasa
Run Mode	: Non-maintained

Optical & Electrical Features

Power Consumption	: 5 W
Final Luminous Flux	: 1395.76 lm
Efficacy	: 279.1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 6500K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Photometric Curve

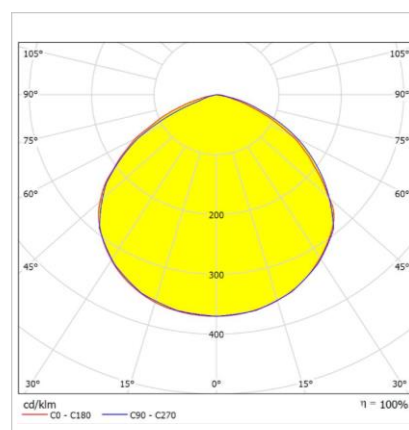

Other Features & Conditions

Operating Temperature Range With Emergency Kit	: ,+10 °C / +35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 50.000 hours @Ta= 35 °C


Optional Features

Electronic Control	: Self/Test, DALI
--------------------	-------------------

Emergency Lighting ARIOSTE

5 W Emergency Lighting LED Luminaire

3164884 EXT 005U 65SD02 1K4 65 ARI YUASA FLP

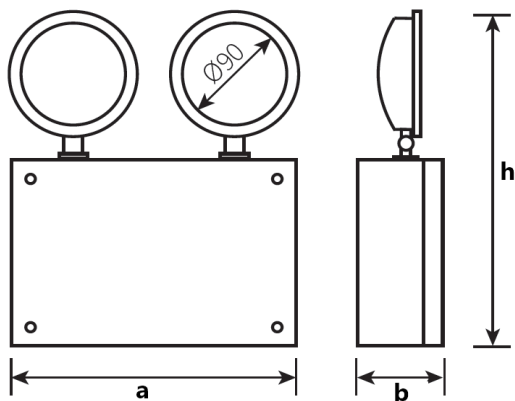

Dimensions (mm)

	a	b	h
Standard	255	98	350

Weight (kg)

Standard	3.600
----------	-------



- The device needs to be charged and discharged for 48 hours twice. After the third 48-hour charge, it will run for 3 Hours.
- EAE, reserves the right to make changes without prior notice.

 **engineering the light**

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 27 22.03.2024