



## DOWNLED Ø115

Recessed Mounted 10 W Spot LED  
Lighting Luminaire

Order Code : 3254692  
Product Code : DWL 010A 40PC00 1K1 04 20 V.2 FLP



### Product Data

#### Standard Features

Housing	: Aluminum Housing
Optic	: Opal Diffuser
Ceiling Type	: Plasterboard
IP Grade (Housing)	: IP40
Installation	: Recessed Mounted
Light Source	: SMD LED
Electronic Control	: On/Off (IP20 Driver)

#### Optical & Electrical Features


Power Consumption	: 10 W
Final Luminous Flux	: 1130 lm
Efficacy	: 113 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is  $\pm 10\%$  Tolerance in Technical Values.

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
LED Life Time - L70	: 72.000 saat @Ta= 35 °C

### Photometric Curve

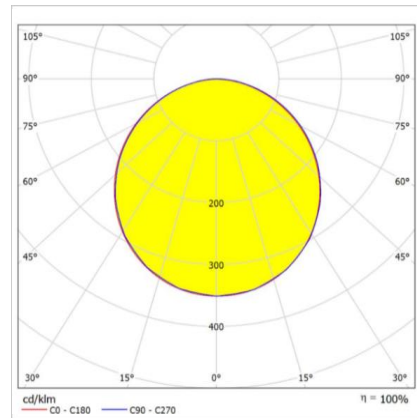

#### Optional Features

Correlated Color Temperatures	: 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes



## DOWNLED Ø115

Recessed Mounted 10 W Spot LED Lighting Luminaire

3254692 DWL 010A 40PC00 1K1 04 20 V.2 FLP

### Dimensions (mm)

	Ø	h	Ø D
Recessed Mounted	115	35	100

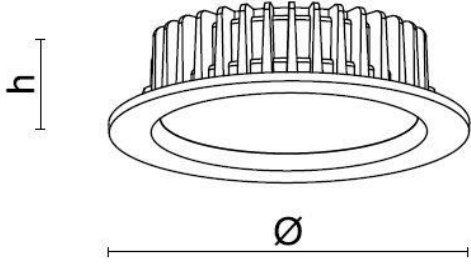

### Weight (kg)

Standard	0.250
----------	-------

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL - TÜRKİYE  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 8.07.2024