



STL-FLP PENDANT

60 W Pendant Single Module Linear
LED Luminaire

Order Code : 3242450
Product Code : STL 060S 400D00 5K8 5070TK3I 180 FLP

Product Data

Standard Features

Housing	: Aluminium Extrusion Housing
Diffuser	: Opal Diffuser
IP Grade	: IP20
Installation	: Pendant
Light Source	: Mid Power LED
Electronic Control	: On/Off


Optical & Electrical Features

Power Consumption	: 60 W
Final Luminous Flux	: 5814,6 lm
Efficacy	: 96,91 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.



Photometric Curve

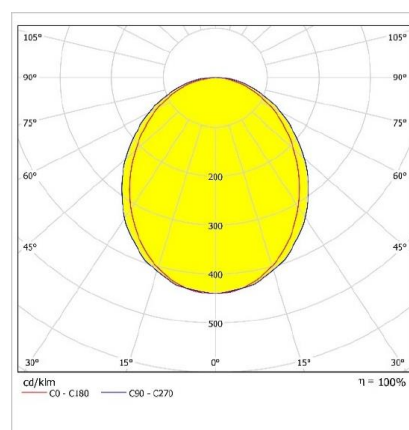

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 100.000 Hours @Ta= 35 °C

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes


STL-FLP PENDANT

60 W Pendant Single Module Linear LED Luminaire

3242450 STL 060S 40OD00 5K8 5070TK3I 180 FLP

Dimensions (mm)

	a	b	h
Single Module	1800	50	70

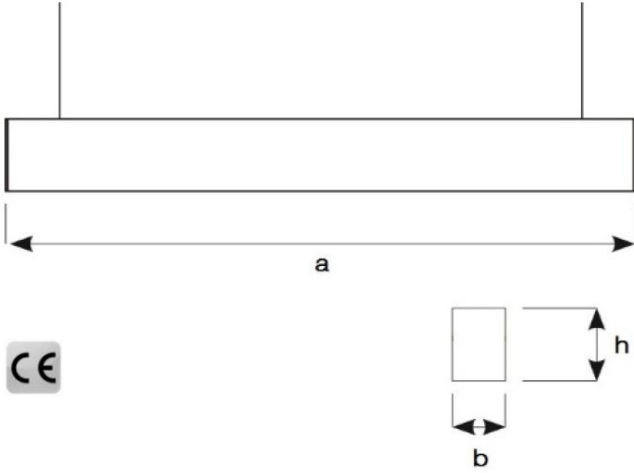

Steel Wire Suspension Kit

Order Code	Product Code
3306265	STL ASKI TAKIMI 2 MT FLP
3306266	STL ASKI TAKIMI 3 MT FLP
3306267	STL ASKI TAKIMI 4 MT FLP
3306268	STL ASKI TAKIMI 5 MT FLP

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 08.08.2023