



Recessed Mounted 12 W Spot LED Luminaire



Photometric Curve

Power Consumption	: 12 W
Final Luminous Flux	: 1195 lm
Efficacy	: 99,5 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions


Optional Features

Correlated Color Temperatures	: 2700 / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 24°

ORI-K MINI


Recessed Mounted 12 W Spot LED Luminaire

3238607 ORI 012A 40SD00 36 1K2 20 MN KR FLP

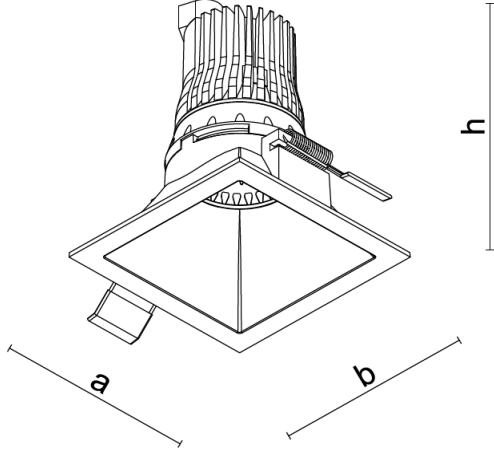

Dimensions (mm)

	a	b	h	d ¹ , d ²
Standard	85	85	115	75x75



Weight (kg)

Standard	0.290
----------	-------



- EAE, reserves the right to make changes without prior notice.



Revision date: 26.01.2023