



LLI

Pendant 3 W Spot LED Luminaire

Order Code : 3243628
Product Code : LLI 003S 40SD00 25 10CM (TEKL) FLP



Product Data

Standard Features

Housing	: Aluminium Housing
Diffuser	: Acrylic
Ceiling Type	: Pendant
IP Grade	: IP20
Installation	: Pendant
Light Source	: COB LED
Electronic Control	: On-Off

Optical & Electrical Features


Power Consumption	: 3 W
Final Luminous Flux	: 225 lm
Efficacy	: 75 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*There is $\pm 10\%$ tolerance in the technical values.

Other Features & Conditions

Operating Temperature Range	: $-5^{\circ}\text{C} / +35^{\circ}\text{C}$
Impact Resistance	: IK03
Led Life Time - L70	: > 72.000 hours @Ta= 35 °C

Photometric Curve

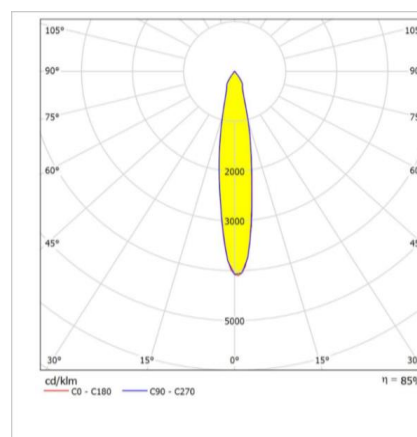

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes



LLI

Pendant 3 W Spot LED Luminaire

3243628 LLI 003S 40SD00 25 10CM (TEKLI) FLP

Dimensions (mm)

	Ø	h
Standart	30	100

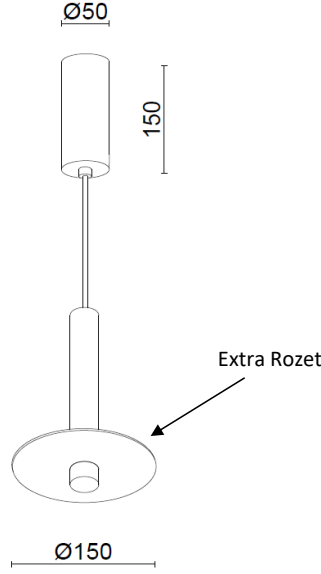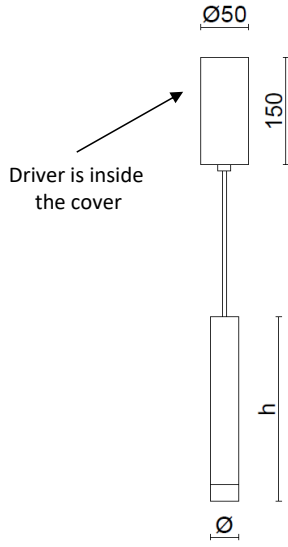

Standart

Extra Rozet Code : 3338453



Order Code : 3338453

Product Code : LLI EXTRA ROZET FLP

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision date: 21.04.2024