



## NETALED

22 W Recessed Mounted LED Luminaire

Ordering Code : 3086354  
Product Code : NTA 022A 40OD00 2K7 450 V.2 FLP



### Product Data

#### Standard Features

Housing	: RAL 9010 electrostatic powder painted aluminum housing
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED


#### Optical & Electrical Features

Power Consumption	: 22.2 W
Final Luminous Flux	: 2755.4 lm
Efficacy	: 123.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Surge Transient Protection	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.000 hours @ Ta=40 °C

### Photometric Curve

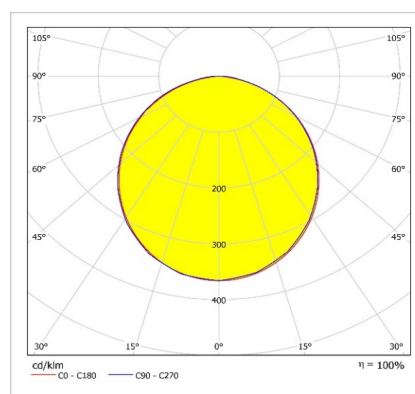


#### Optional Features

Ceiling Types	: Surface mounted and Pendant
Correlated Color Temperatures	: 3000K - 5700K
Emergency Kit Options	: 1,3 hours
Color Option	: RAL 9004

# NETALED


22 W Recessed Mounted LED Luminaire

3086354 NTA 023A 40OD00 2K3 450 V.2

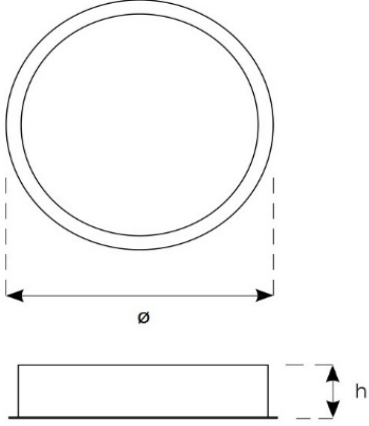

Dimensions (mm)

	Ø	h	Ø D
Recessed Mounted	452	95	425
Surface Mounted	439	95	-
Pendant	439	95	-



Weight (kg)

Recessed Mounted	2,5
Surface Mounted	2,5
Pendant	2,5



- EAE, reserves the right to make changes without prior notice.



Revision date: 21.05.2024