



# NETALED

47 W Recessed Mounted LED Luminaire

Ordering Code : 3086363  
Product Code : NTA 047A 40OD00 6K3 650 V.2 FLP



## Product Data

### Standard Features

Housing	: RAL 9010 electrostatic powder painted aluminum housing
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED


### Optical & Electrical Features

Power Consumption	: 47.6 W
Final Luminous Flux	: 6314.1 lm
Efficacy	: 132.4 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Surge Transient Protection	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

### Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.000 hours @ Ta=40 °C

## Photometric Curve

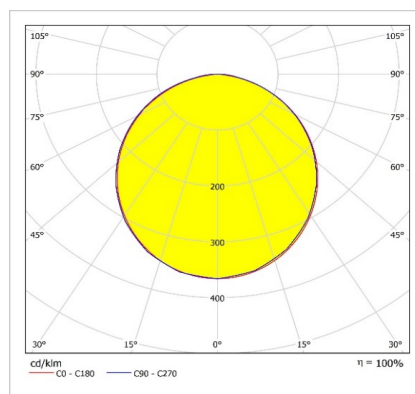


### Optional Features

Ceiling Types	: Surface mounted and Pendant
Correlated Color Temperatures	: 3000K - 5700K
Emergency Kit Options	: 1,3 hours
Color Option	: RAL 9004

# NETALED


47 W Recessed Mounted LED Luminaire

3086363 NTA 047A 40OD00 6K3 650 V.2 FLP

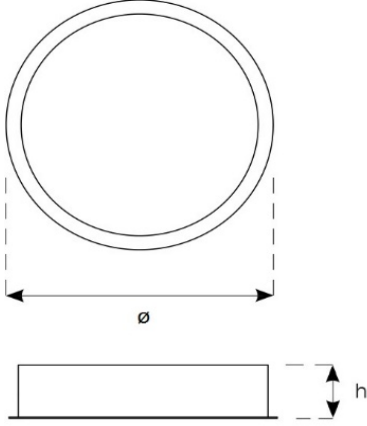

Dimensions (mm)

	Ø	h	Ø D
Recessed Mounted	670	95	625
Surface Mounted	655	95	-
Pendant	655	95	-



Weight (kg)

Recessed Mounted	5,5
Surface Mounted	5,5
Pendant	5,5



- EAE, reserves the right to make changes without prior notice.



Revision date: 21.05.2024