



NETALED

130 W Recessed Mounted LED Luminaire

Ordering Code : 3086381
Product Code : NTA 130A 400D00 18K4 1200 V.2 FLP



Product Data

Standard Features

Housing	: RAL 9010 electrostatic powder painted aluminum housing
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 129.3 W
Final Luminous Flux	: 18488 lm
Efficacy	: 142.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Surge Transient Protection	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.000 hours @ Ta=40 °C

Photometric Curve

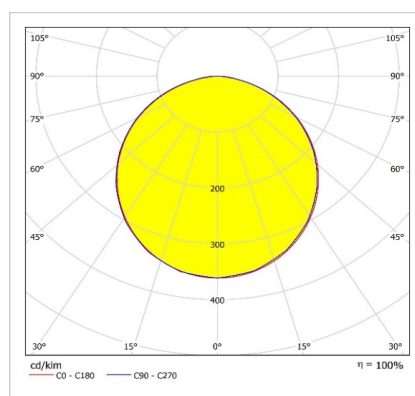


Optional Features

Ceiling Types	: Surface mounted and Pendant
Correlated Color Temperatures	: 3000K - 5700K
Emergency Kit Options	: 1,3 hours
Color Option	: RAL 9004

NETALED


130 W Recessed Mounted LED Luminaire

3086381 NTA 130A 40OD00 18K4 1200 V.2 FLP

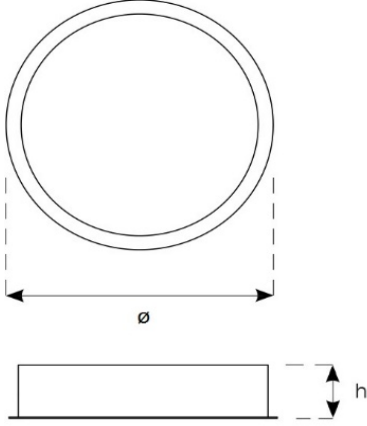

Dimensions (mm)

	Ø	h	Ø D
Recessed Mounted	1219	95	1175
Surface Mounted	1212	95	-
Pendant	1212	95	-



Weight (kg)

Recessed Mounted	14
Surface Mounted	14
Pendant	14

- EAE, reserves the right to make changes without prior notice.



Revision date:21.05.2024