



GIZA L4

Recessed Mounted 15W Spot LED Luminaire

Order Code : 3236257
Product Code : GZA 015A 40LN00 50 1K4 20 L4 FLP



Product Data

Standard Features


Housing	: Aluminium Housing
Optic	: 50° Lens + Reflector (Black)
IP Grade	: IP20
Installation	: Recessed Mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 14,7 W
Final Luminous Flux	: 1421 lm
Efficacy	: 96,6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Photometric Curve

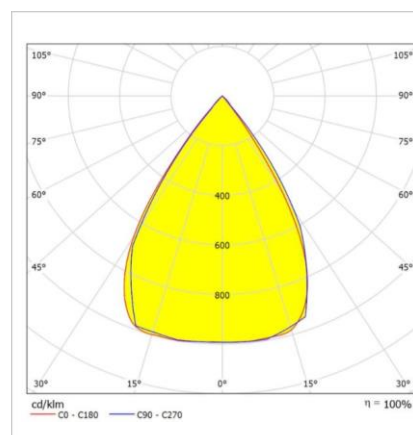

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 hours @Ta= 35 °C

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 80°




GIZA L4

Recessed Mounted 15W Spot LED Luminaire

3236257 GZA 015A 40LN00 50 1K4 20 L4 FLP



Dimensions (mm)

	a	b	h	axb
Standart	60	180	65	50x170

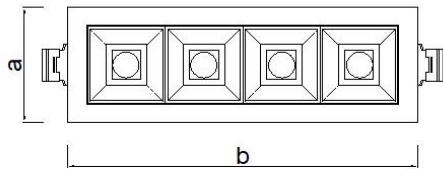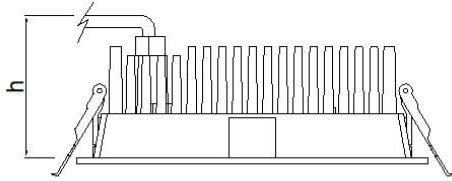

Weight (kg)

Standard	0.465
----------	-------



- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision Date: 9.07.2024