

## STL FRAME FLP

72 W Pendant LED Luminaire

Order Code : 3301445  
Product Code : STL 072S 400D00 5K7 5070TK3I 6012 FR FLP

### Product Data

#### Standard Features

Housing	: Aluminium Extrusion Housing
Diffuser	: Glare Minimizing Highly Permeable Diffuser
IP Grade	: IP20
Installation	: Pendant
Light Source	: Mid Power LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 72 W
Final Luminous Flux	: 5695.2 lm
Efficacy	: 79.1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80


\* There is  $\pm 10\%$  Tolerance in Technical Values.

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 100.000 hours @Ta= 35 °C



### Photometric Curve

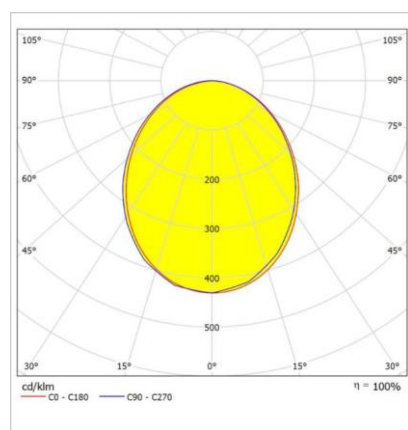

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes


# STL FRAME FLP

72 W Pendant LED Luminaire

3301445 STL 072S 400D00 5K7 5070TK3I 6012 FR FLP

## Dimensions (mm)

	a	b	h	c
Frame 60x120	600	1200	70	50

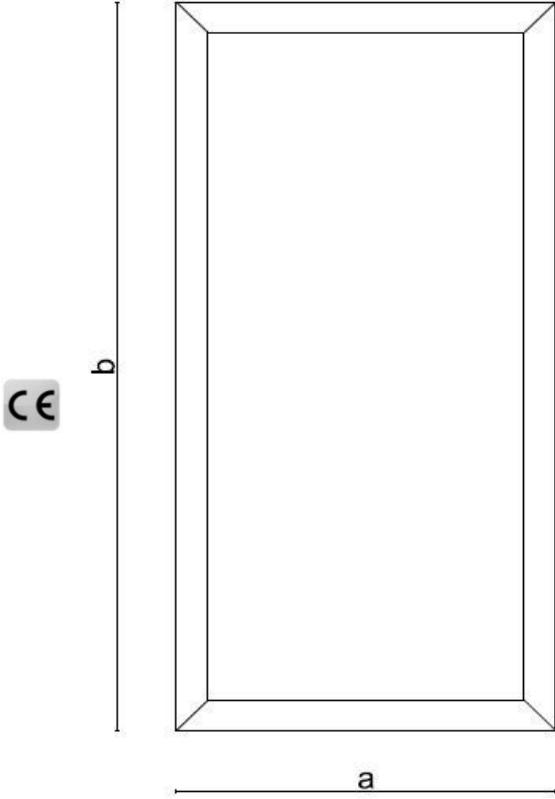

Steel Wire Suspension Kit	
Order Code	Product Code
3242453	STL ASKI TAKIMI 1,5 MT FLP
3306265	STL ASKI TAKIMI 2 MT FLP
3306266	STL ASKI TAKIMI 3 MT FLP
3306267	STL ASKI TAKIMI 4 MT FLP
3306268	STL ASKI TAKIMI 5 MT FLP

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 25.07.2023