



## GIZA MESH

Open Cell 10 W Spot LED Luminaire

Order Code : 3281325  
Product Code : GZA 010H 40LN00 80 1K1 20 FLP



### Product Data

#### Standard Features


Housing	: Aluminium Housing
Optic	: 80° Lens + Reflector (Black)
Ceiling Type	: Open Cell
IP Grade	: IP20
Installation	: Recessed Mounted
Light Source	: Mid Power LED
Electronic Control	: On / Off

#### Optical & Electrical Features

Power Consumption	: 10 W
Final Luminous Flux	: 1076 lm
Efficacy	: 107.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos $\phi$ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is  $\pm$  10% Tolerance in Technical Values.

### Photometric Curve

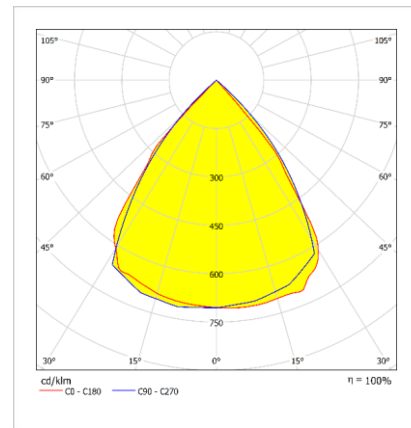

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C


#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes
Degree Option	: 50°

# GIZA MESH

Open Cell 10 W Spot LED Luminaire

3281325 GZA 010H 40LN00 80 1K1 20 FLP

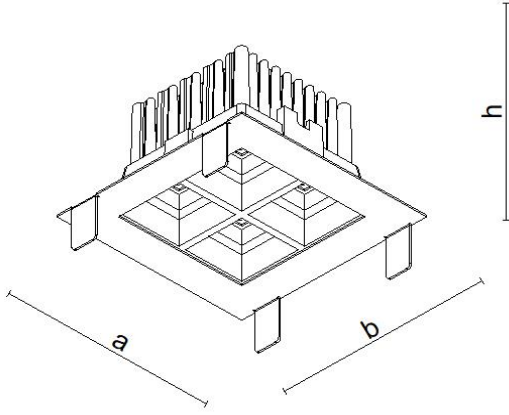

## Dimensions (mm)


	a	b	h	Cell Ceiling
Standard	100	100	75	100x100



Cell Ceiling

## Weight (kg)

Standard	0.525
----------	-------

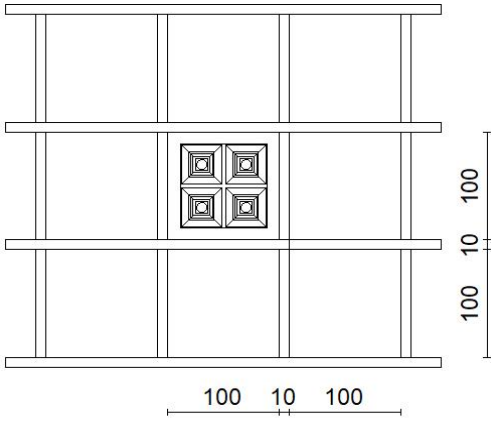

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 8.03.2024