



PB2 PB V.2

40W Urban LED Lighting Luminaire



Order Code : 3248340
Product Code : PB2 040U 40OD00 3A 4K0 PB V2 FLP

Product Data

Standard Features


Housing	: Aluminium Housing
Optic	: Opal diffuser
IP Grade	: IP65
Installation	: Pole mounted
Light Source	: Mid Power Led

Optical & Electrical Features

Power Consumption	: 40 W
Final Luminous Flux	: 4050 lm
Efficacy	: 101.2 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Photometric Curve

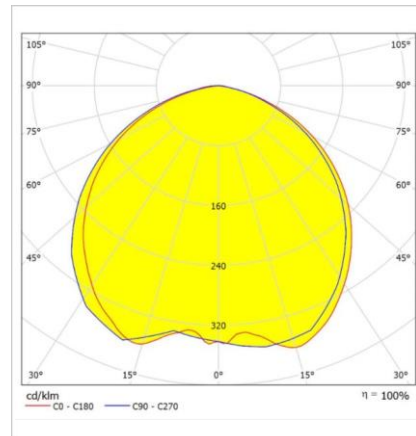

Other Features & Conditions

Operating Temperature Range	: -25 °C/+55 °C
Impact Resistance	: IK07
LED Life Time - L70	: > 55.000 hours @Ta= 55 °C


Optional Features

Correlated Color Temperatures	: 3000K / 6500K
Emergency Kit Options	: 1-10 V Dimko , Dali

PB2 PB V.2

40W Urban LED Lighting Luminaire

3248340 PB2 040U 40OD00 3A 4K0 PB V2 FLP

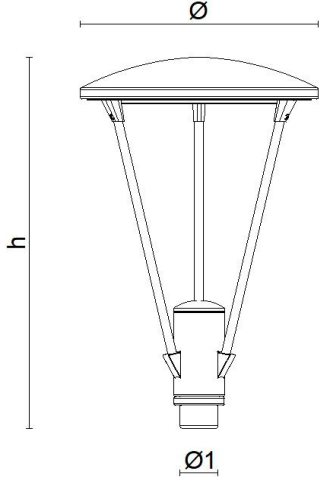

Dimensions (mm)

	Ø	h	Ø1
Standard	470	895	76

Weight (kg)

Standard	10,95
----------	-------

Other Features & Conditions

Order Code	Descriptions	Product Codes
1019004	PB2 PB CAP76 3 MT	CMN PB CAP76 3M DIREK
1019006	PB2 PB CAP76 4 MT	CMN PB CAP76 4M DIREK



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL - TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 30.01.2023