



## OSIRIS

272 W LED Lighting luminaire for street Lighting



Order Code : 3270763  
Product Code : OSI 272D 40LN00 100 33K0 ELP

### Product Data

#### Standard Features

Housing	: Aluminium injection housing
Diffuser	: Tempered transparent glass
Optic	: 100° lens
IP Grade	: IP66
Installation	: Pole mounted
Light Source	: Mid Power LED


#### Optical & Electrical Features

Power Consumption	: 272.3 W
Final Luminous Flux	: 32740 lm
Efficacy	: 120.2 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 6 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/ +40 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 72.000 saat @Ta= 40 °C

### Photometric Curve

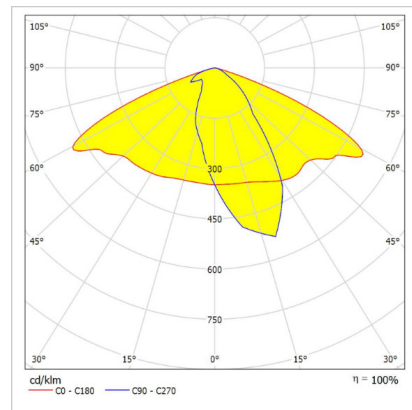

#### Optional Features

Correlated Color Temperatures	: 3000K, 5000K, 57000K, 6500K
DALI	: Yes


# OSIRIS

272 W LED Lighting luminaire for street Lighting

**3270963** OSI 272D 40LN00 100 33K0 ELP

## Dimensions (mm)

	a	b	h
Standard	910	320	112

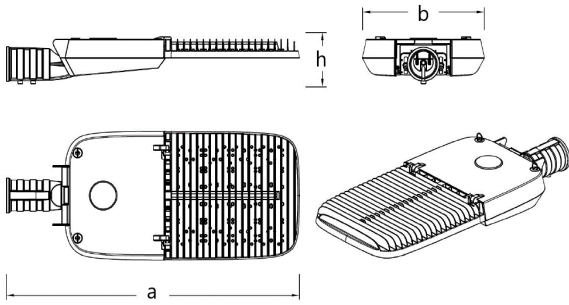

## Weight (kg)

Standard	10,5
----------	------



- EAE, reserves the right to make changes without prior notice.



Revision date: 28.12.2020