


Surface Mounted 53 W Etanj LED Luminaire



Photometric Curve

Housing	: Plastic Extrusion
Optic	: Opal diffuser
IP Grade	: IP66
Installation	: Surface mounted
Light Source	: Mid Power LED

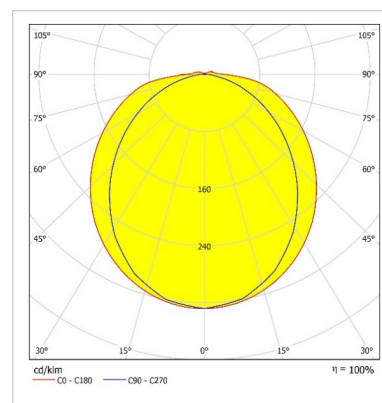

Power Consumption	: 52.5 W
Final Luminous Flux	: 5870.1 lm
Efficacy	: 116.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0.9
Surge Transient Protection	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80



Operating Temperature Range	: -20°C/+35 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 72.000 saat @Ta= 35 °C

Correlated Color Temperatures : 6500K

YPL NG

Surface Mounted 53 W Etanj LED Luminaire

3289998 YPL 053U 400D00 5K8 149 NG 66

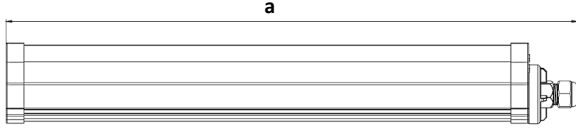

Dimension (mm)


	a	b	h
Standard	1500	57	57

Weight (kg)

Standard	1,3
----------	-----




Hanger Sets and Features

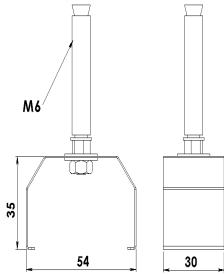


Order Code : 3243706

Product Code : Duvar Askı Takımı

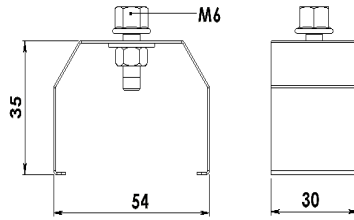

Order Code : 3243707

Product Code : Tava Askı Takımı

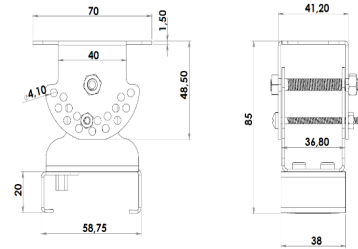

Order Code : 3187855

Product Code : Dereceli Askı Takımı

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 07.04.2023