



## ORI SMALL DARK IP65/20

Recessed Mounted 8 W Spot LED Luminaire

Order Code : 3362422  
Product Code : ORI 008A 40CM00 36 0K8 65/20 S DRK Y FLP



### Product Data

#### Standard Features


Housing	: Aluminium Housing
Optic	: 36° Reflector (Black)
Ceiling Type	: Plasterboard
IP Grade (Housing)	: IP65
Installation	: Recessed Mounted
Light Source	: COB LED
Electronic Control	: On/Off (IP20 Driver)

#### Optical & Electrical Features

Power Consumption	: 8 W
Final Luminous Flux	: 665,6 lm
Efficacy	: 83,2 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

### Photometric Curve

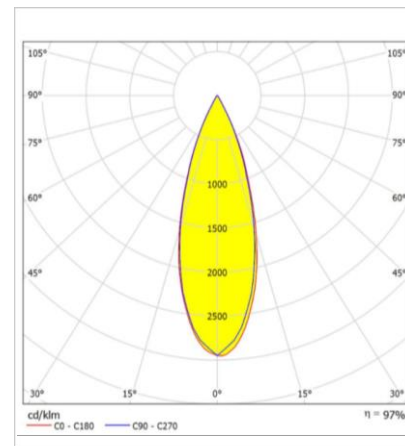

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 72.000 saat @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes
Degree Option	: 24°


# ORI SMALL DARK 65/20

Recessed Mounted 8 W Spot LED Luminaire


3362422 ORI 008A 40CM00 36 OK8 65/20 S DRK Y FLP

Dimensions (mm)

	Ø	h	ØD
Standard	65	81	58

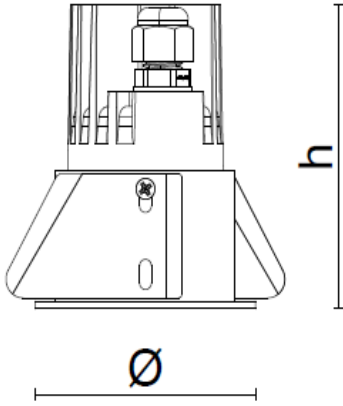


Cut-out





Weight (kg)

Standard



IP20 Driver



IP65 Housing

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 26.08.2024

