

HBC LOWBAY

Surface Mounted 179 W LED High Bay Luminaire

Order Code : 3201554
Product Code : HBC 179U 400A00 82 23K3 PC



Product Data

Standard Features


Housing	: SW 306G painted aluminium injection housing
Optic	: Lens 82°
Diffuser	: PC
IP Grade	: IP66
Installation	: Surface mounted / Pendant
Light Source	: Mid Power LED

Optical & Electrical Features

Power Consumption	: 179.8 W
Final Luminous Flux	: 23228.7 lm
Efficacy	: 129.1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 4 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Photo-biologic Risk Group	: RG1

* There is ± 10% tolerance in Technical Values.

Photometric Curve

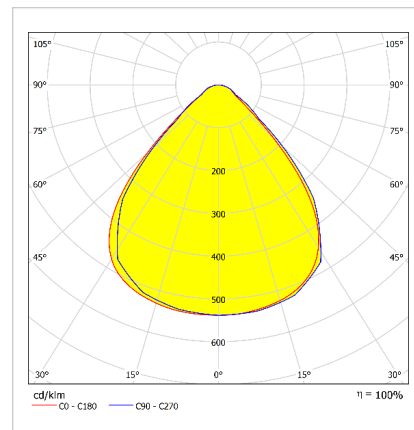

Other Features & Conditions

Operating Temperature Range	: -20 °C/+47 °C
Impact Resistance	: IK05
Led Life Time - L70	: > 72.000 hours @ Ta=47 °C

Optional Features


Correlated Color Temperatures	: 3000K, 5000K, 5700K, 6500K
Emergency Kit Options	: No
DALI Option	: Yes
Optic Pain Option	: 63°, 67°

HBC LOWBAY

Surface Mounted 179 W LED High Bay Luminaire

3201554 HBC 179U 400A00 82 23K3 PC

Standard

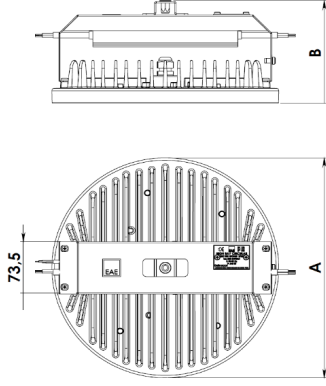

Dimensions (mm)


	a	b
Standard	Ø315	148

Weight (kg)

Standard	4.6
----------	-----



Suspension Set

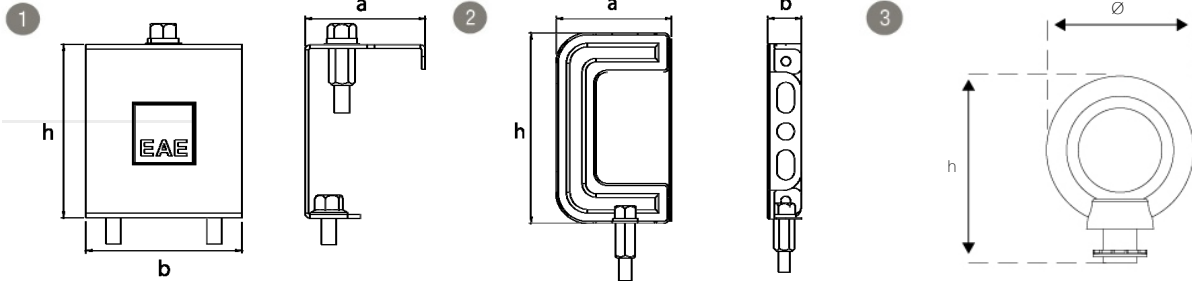

Cable Tray and Wall Hanger Set

Order Code : 3188242

Product Code : HBC STD TAVA ASKI TK

Busbar Hanger Set

Order Code : 3188241

Product Code : HBC STD BUSBAR ASKI TK

Pendant Single Hanger Set

Order Code : 3096325

Product Code : SRD SARKIT TEKLI ASKI TK

Suspension Set Dimensions (mm) and Weight (gr)

	a	b	h	Weight (gr)
1- Cable Tray and Wall Hanger Set	54.5	62	101.7	100
2- Busbar Hanger Set	55.3	17,3	92	100
3- Pendant Single Hanger Set	36	-	50,5	25

- EAE, reserves the right to make changes without prior notice.



Revision date: 20.01.2021