



## FLEXBAR V.2

9 W/1m 6 Module LED Luminaire  
Flexible Solution For Linear Lighting



Order Code : 3235032  
Product Code : FLX 009G 40SD28 1K27 01M6 V.2

### Product Data

#### Standard Features

Housing	: Plastic Injection
Diffuser	: Transparent diffuser
IP Grade	: IP20
Installation	: Cove lighting
Light Source	: Mid Power LED


#### Optical & Electrical Features

Power Consumption	: 9 W
Final Luminous Flux	: 1272 lm (1 metre )
Efficacy	: 141.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 24V DC
Power Factor	: > 0,9
Max. Voltage Strength (Surge)	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/+45 °C
Operating Temperature Range With Emergency ACK	: +5 °C/+35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 102.000 hours @ Ta=45°C

### Photometric Curve

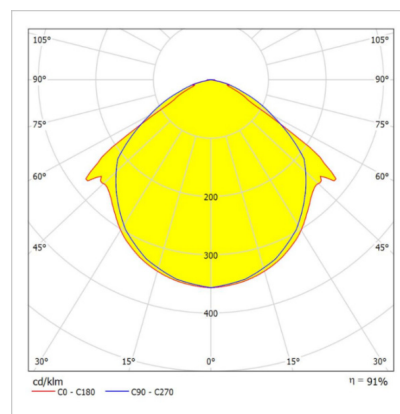


#### Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

# FLEXBAR V.2

9 W/1m 6 Module LED Luminaire Flexible Solution For Linear Lighting

3235032 FLX 009G 40SD28 1K27 01M6 V.2

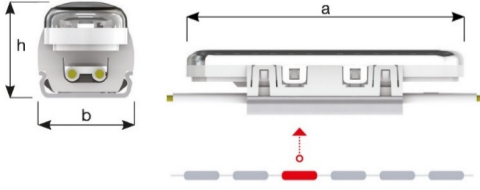

## Module Dimensions (mm)

	a	b	h
Standard	92	23	22

## Weight (gr)


Standard	201
With Emergency Kit (1, 3 hrs.)	901, 1426

## Opal Diffuser (Optional)



\*Luminaire has halogen-free wiring.

## Advantages

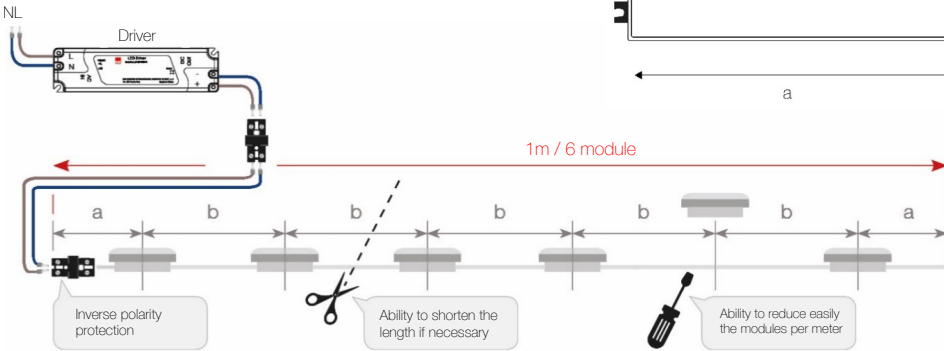

## 1m / 6 module

a: 83 mm

b: 166 mm

\* Unit of measure between modules is mm.

\*Ability to place 4, 5, 6, 7, 8, 9 modules per 1 m cable.

- EAE Aydınlatma reserves the right to make any change without prior notice.



Revision date: 31.10.2023