



BLOOM

Recessed Mounted 60x60cm 36 W LED Luminaire

Order Code : 3209021
Product Code : BLM 036A 400D00 4K9 606020



Product Data


Standard Features

Housing	: 0,40mm Recessed mounted RAL9003 Powder finished sheet steel
Diffuser	: Opal diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 35,6 W
Final Luminous Flux	: 4896,8 lm
Efficacy	: 137,3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 1050 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Photometric Curve

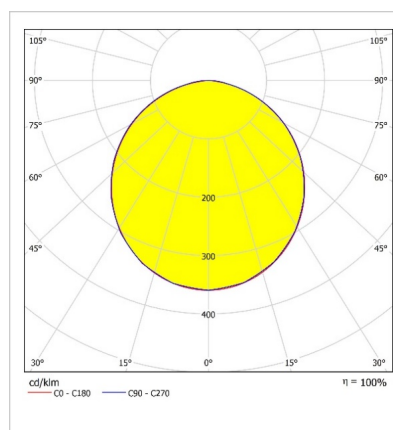

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 102.000 hours @ Ta=40 °C


Optional Features

Ceiling Types	: Rock-wool, clip-in and surface mounted
Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Color Option	: RAL 9005, 9010

BLOOM


Recessed Mounted 60x60cm 36 W LED Luminaire

3209021 BLM 036A 400D00 4K9 606020

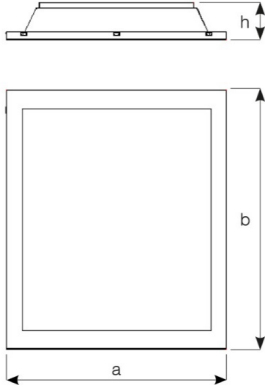

Dimensions (mm)

	a	b	h	d ¹ , d ²
Rock-wool	595	595	75	-
Plasterboard	595	595	75	580x580
Clip-in	600	600	75	-
Surface-mounted	611	611	83	-

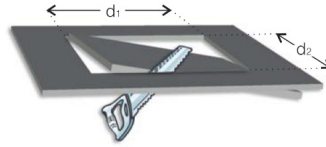

Weight (kg)

Standard	
With Emergency Kit (1 hr.)	3,4
With Emergency Kit (3 hrs.)	4,6
	5,1

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

engineering the light

Revision date: 24.09.2018