



# BLOOM

Recessed Mounted 30x60cm 17 W LED Luminaire



Order Code : 3275606  
Product Code : BLM 017A 400D00 1K9 306020

## Product Data


### Standard Features

Housing	: 0,40mm Recessed mounted RAL9003 Powder finished sheet steel
Diffuser	: Opal diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off

### Optical & Electrical Features

Power Consumption	: 17,1 W
Final Luminous Flux	: 1993,3 lm
Efficacy	: 116,4 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 350 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

## Photometric Curve

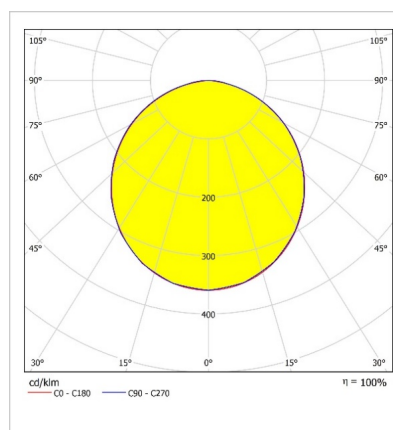

### Other Features & Conditions

Operating Temperature Range	: -20 °C/+44 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 102.000 hours @ Ta=44 °C

### Optional Features

Ceiling Types	: Rock-wool, clip-in and surface mounted
Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Color Option	: RAL 9005, 9010

# BLOOM


Recessed Mounted 30x60cm 17 W LED Luminaire

**3275606** BLM 017A 40OD00 1K9 306020



## Dimensions (mm)

	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Rock-wool	595	295	87	-
Plasterboard	595	295	87	580x280
Clip-in	600	300	87	-
Surface-mounted	600	300	65	-

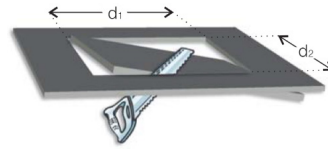

## Weight (kg)

Standard	4
With Emergency Kit (1 hr.)	4,6
With Emergency Kit (3 hrs.)	5,1

- EAE, reserves the right to make changes without prior notice.



**EAE Aydınlatma A.Ş.**

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90  
**www.eaeaydinlatma.com.tr**

**engineering the light**

Revision date: 06.10.2022