



SHT

Surface mounted 30x120cm 39 W LED Luminaire



Order Code : 3203597
Product Code : SHT 039A 40CM00 4K70 301265 90C

Product Data

Standard Features

Housing	: Surface mounted RAL9010/SA8104 : Powder finished sheet steel
Diffuser	: Tempered glass
IP Grade	: IP65
Installation	: Plasterboard
Light Source	: Mid Power LED
Electronic Control	: On/Off


Optical & Electrical Features

Power Consumption	: 39.1 W
Final Luminous Flux	: 3949.9 lm
Efficacy	: 100.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Surge Transient Protection	: > 0,9
Drive Current	: 4000K
Color Rendering Index	: >90
Photobiological Risk Group	: RG0

Other Features & Conditions

Operating Temperature Range	: -20 °C/+35 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK 06
Led Life Time - L70	: > 72.000 hours @ Ta=35 °C

Photometric Curve

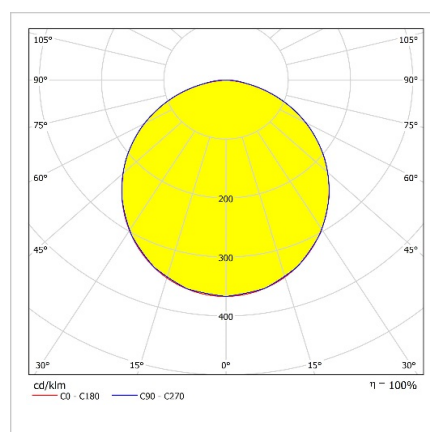


Optional Features

Ceiling Types	: Rock-wool, Surface mounted and Clip-in
Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1, 3 hours

SHT

Surface mounted 30x120cm 39 W LED Luminaire

3203597 SHT 039A 40CM00 4K70 301265 90C



Dimensions (mm)

	a	b	h	d ¹ , d ²
Rock-wool	1195.5	295.5	120	-
Plasterboard	1195.5	295.5	120	1180x280
Clip-in	1200	300	120	-



Weight (kg)

Standard	12,3
With Emergency Kit (1 hr.)	12,9
With Emergency Kit (3 hrs.)	12,9

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 31.07.2023