



## SHT

Surface mounted 60x60cm 35 W LED Luminaire



Order Code : 3224762  
Product Code : SHT 035A 40CM00 4K30 606065 80C

### Product Data

#### Standard Features

Housing	: RAL9010/SA8104 Powder finished sheet steel
Diffuser	: Glass and opal diffuser
Ceiling Type	: D'UghYfvcUfX
IP Grade	: IP65
Installation	: Recessed mounted
Light Source	: Mid Power LED


#### Optical & Electrical Features

Power Consumption	: 35.1 W
Final Luminous Flux	: 4266.5 lm
Efficacy	: 121.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Surge Transient Protection	: > 0,9
Drive Current	: 4000K
Color Rendering Index	: >80
Photobiological Risk Group	: RG0

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/+35 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK 06
Led Life Time - L70	: > 72.000 hours @ Ta=35 °C

### Photometric Curve

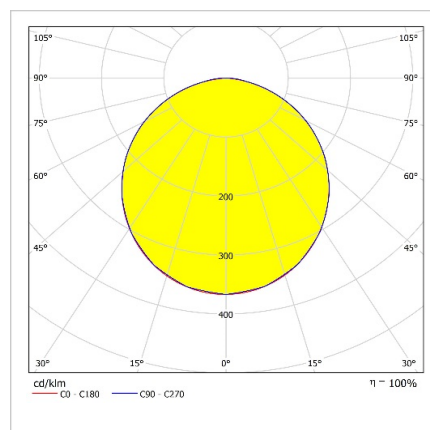


#### Optional Features

Ceiling Types	: Plasterboard, Rock-wool and Clip-in
Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1,3 hours

## SHT

Surface mounted 60x60cm 35 W LED Luminaire

**3224762** SHT 035A 40CM00 4K30 606065 80C

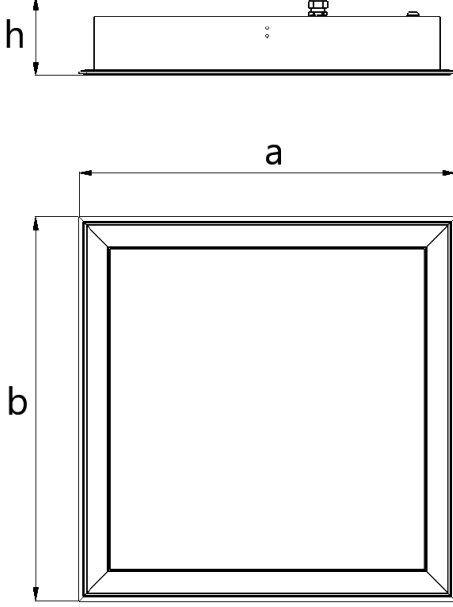

### Dimensions (mm)

	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Rock-wool	596	596	120	
Plasterboard	606	606	120	585x585
Clip-in	600	600	120	

### Weight (kg)

Standard	11,4
With Emergency Kit (1 hr.)	12
With Emergency Kit (3 hrs.)	12

- EAE, reserves the right to make changes without prior notice.



Revision date: 31.07.2023